


2.92mm Attenuators • Male to Female • DC - 40 GHz

Part No: HA40A-XX**

**Replace XX with dB Value

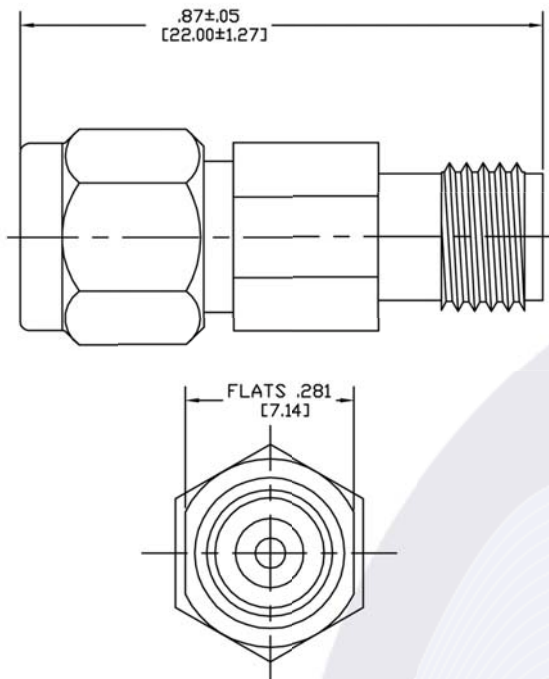

Electrical

- **Frequency Range** DC - 40 GHz
- **Attenuation (dB)**

DC - 26.5GHz	26.5-40GHz
1 -9	 ± 0.50 dB.....±0.75dB
10, 20	 ± 0.50 dB.....±0.75dB
30	 ± 0.75 dB.....±0.75dB
- **VSWR**

DC - 26.5 GHz	..1.30:1
26.5 - 40 GHz	..1.40:1
- **Impedence** 50 Ohms
- **RF Power Nominal** 1/2 Watt @ 25°C
Derates linearly to 10% @125°C
- **Temperature Range** -55°C - +155°C

Materials

- **Connector Body and Coupling Nut**
Passivated Stainless Steel
- **Center Contact**
Gold Plated BeCu