

Part No:

29J-185J-FF



2.92mm Female to 1.85mm Female Adapter Passivated Stainless Steel Body, DC - 40 GHz

The HASCO **29J-185J-FF** is a Precision Between-Series RF Adapter that operates from DC to 40 GHz. and offers 1.15:1 max VSWR.

The 29J-185J-FF Adapter is RoHS Compliant



HASCO stocks an extensive selection of RF and Microwave between-series, in-series, right angle and low PIM adapters. Adapters that have a male to female or plug to jack configuration are known as “connector savers.” Typically, a low loss or low VSWR male to female adapter is placed on more expensive component connectors to prevent damage. Bulkhead adapters and straight adapters are also available from HASCO Components

Electrical

- Frequency Range DC - 40 GHz
- VSWR DC - 40 GHz..... 1.15:1
- Impedance 50 Ohms
- Insertion Loss $\leq 0.05 * \sqrt{f(\text{GHz})}$ dB
- Durability 500 Cycles Min.


Environmental Data


- Temperature Range -55°C - +105°C

Material

- Insulator PPO
- Center Conductor Gold Plated BeCu
(Gold 4 Over Nickel-Phosphorous Alloy 80 over Copper 20)
- Body Passivated Stainless Steel

2.92mm Female to 1.85mm Female Adapter | DC - 40 GHz | Outline Drawing

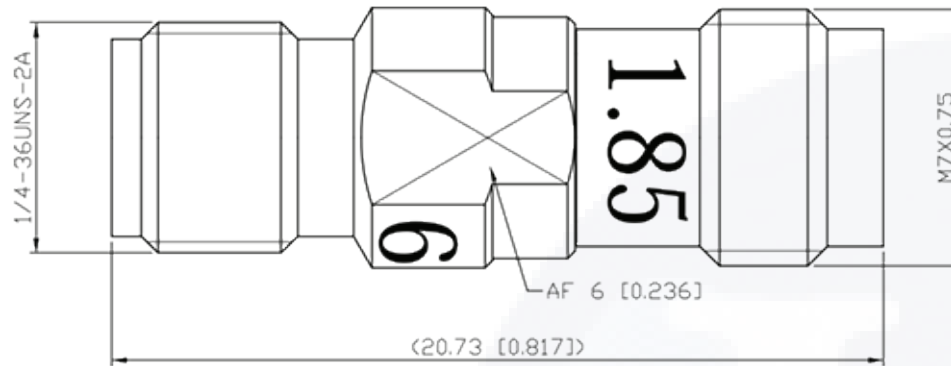

LTR	DESCRIPTION	DATE	APPR.	DRAWN BY: JMS	CHECKED BY: TAC		5214 Bonsai Street • Moorpark, CA 93021 (888) 498-3242 • sales@hasco-inc.com www.hasco-inc.com			
-	RELEASE	03/20	TAC	APPROVED BY: TAC						
				THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HASCO COMPONENTS AND SHALL NOT BE REPRODUCED, COPIED NOR USED - IN WHOLE OR IN PART - AS THE BASIS FOR THE MANUFACTURE OR SALE OF OTHER ITEMS WITHOUT THE EXPRESS, WRITTEN PERMISSION OF HASCO COMPONENTS.			MATERIALS:	CAGE CODE:	SCALE:	SIZE:
							SEE DATA SHEET	OT8L4	N/A	A
							FINISHES:	PART NO./DRAWING NO.		REV:
							SEE DATA SHEET	29J-185J-FF		-
THIS DRAWING IS A CONTROLLED DOCUMENT										