

Part No:

HAD-BNCJ-BNCJ



BNC Female to BNC Female General Purpose Adapter - 4 GHz

Electrical

- Impedance 50 Ohms
- Frequency Range DC - 4 GHz
- VSWR 1.20:1 Max

Material

Note: All plating thickness values are in micro-inches.

- Body Brass (Plating: Tin-Zinc-Copper Alloy 100 over Copper 50)
- Contact Pin BeCu (Plating: Gold 4 over Nickel Phosphorus Alloy 80 over Copper 20)
- Insulator Teflon


The HASCO **HAD-BNCJ-BNCJ** is a general purpose BNC Male to BNC Male in-series adapter from HASCO. This in-series coaxial adapter will operate up to 4 GHz.


The HAD-BNCJ-BNCJ is RoHS compliant.



HASCO stocks an extensive selection of RF and Microwave between-series, in-series, right angle and low PIM adapters.

BNC Female to BNC Female Adapter | DC ~ 4 GHz | Outline Drawing

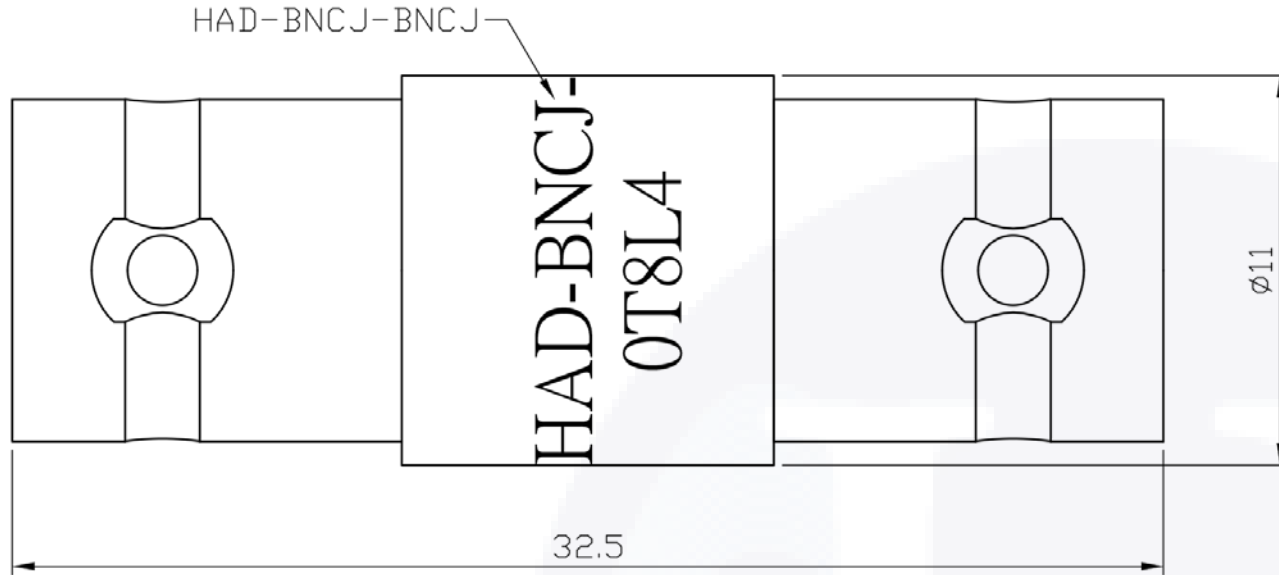

LTR	DESCRIPTION	DATE	APPR.	DRAWN BY: <i>JMS</i>	CHECKED BY: <i>JMS</i>	 5214 Bonsai Street • Moorpark, CA 93021 (888) 498-3242 • sales@hasco-inc.com www.hasco-inc.com				
-	RELEASE	07/21	TAC	APPROVED BY: <i>TAC</i>						
				THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HASCO COMPONENTS AND SHALL NOT BE REPRODUCED, COPIED NOR USED - IN WHOLE OR IN PART - AS THE BASIS FOR THE MANUFACTURE OR SALE OF OTHER ITEMS WITHOUT THE EXPRESS, WRITTEN PERMISSION OF HASCO COMPONENTS.		MATERIALS: SEE DATA SHEET	CAGE CODE: 0T8L4	SCALE: N/A	SIZE: A	
						FINISHES: SEE DATA SHEET	PART NO./DRAWING NO. HAD-BNCJ-BNCJ		REV: -	
						THIS DRAWING IS A CONTROLLED DOCUMENT				