

SMA FEMALE TO SMA FEMALE LOW PIM ADAPTER | DC - 18 GHz | DATASHEET

Electrical (Typical)

Impedance: 50 Ohms

Frequency Range: DC - 18 GHz

Low PIM adaptor

VSWR:

1.35 : 1 (Max) for DC - 18 GHz


Operating Temp Range: -65 C - +125 C

PIM: < -150 dBc


Mechanical (Typical)

Connector: Mates with MIL-STD-348

RoHS Compliant: YES

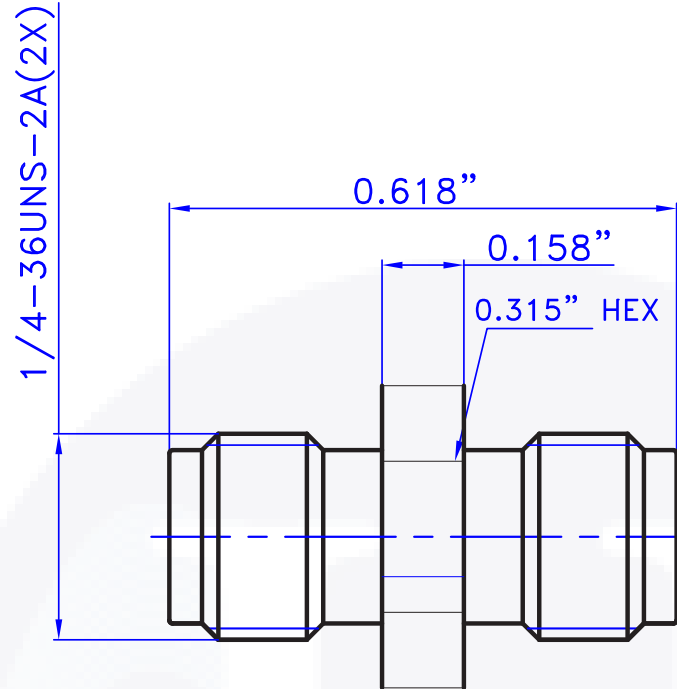

To view online, go to: <https://www.hasco-inc.com/adapters/sma-female-to-sma-female-low-pim-adapter-dc-to-18-ghz/>

LTR	DESCRIPTION	DATE	APPR.	DRAWN BY: ABC	CHECKED BY: ABC		5214 Bonsai Street • Moorpark, CA 93021 (888) 498-3242 • sales@hasco-inc.com www.hasco-inc.com		
-	RELEASE	12/16	TAC	APPROVED BY: ABC					
				THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HASCO COMPONENTS AND SHALL NOT BE REPRODUCED, COPIED NOR USED - IN WHOLE OR IN PART - AS THE BASIS FOR THE MANUFACTURE OR SALE OF OTHER ITEMS WITHOUT THE EXPRESS, WRITTEN PERMISSION OF HASCO COMPONENTS.		MATERIALS:	CAGE CODE:	SCALE:	SIZE:
						SEE DATA SHEET	0T8L4	N/A	A
						FINISHES:	PART NO./DRAWING NO.		REV:
						SEE DATA SHEET	1212-35-50-LPIM		-
THIS DRAWING IS A CONTROLLED DOCUMENT									