

**Electrical (Typical)**

Impedance: 50 Ohms

Frequency Range: DC - 18 GHz


**Mechanical (Typical)**


Mating: 1/4 - 36 threaded coupling

Recommended Mating Torque: 8 inch-lbs

Stainless Connector Durability: 500 matings

MATERIALS		
	Materials	Finish
Body	Stainless Steel	Passivated
Insulator	PTFE	None
Center contact	Beryllium Copper	Gold

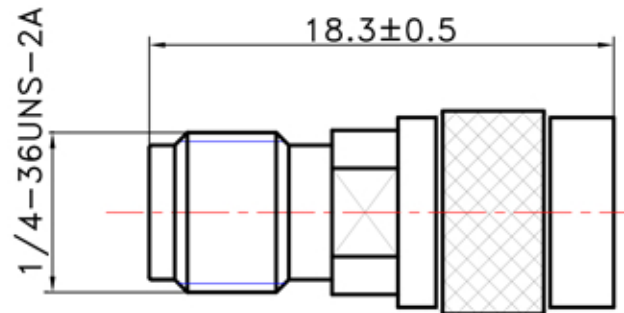

All dimension are MM		SIZE A	SCALE NO	CAGE CODE 0T8L4		5214 Bonsai Street Moorpark, CA (888) 498-3242 www.hasco-inc.com
		REV. B	SHEET 1/1			
DRAWING BY: P. Xie	DATE: 9/21/2009	PART NO. 1312-33-50-QC3			TITLE Stainless Steel (Passivated) SMA Female/Male Adaptor	
CHECKED BY: W. Lu	DATE: 9/21/2009					
APPROVED BY: Z. Jiang	DATE: 9/21/2009					