

Part No:

# HAD-BNCJ-TNCJ



## *BNC Female to TNC Female General Purpose Adapter - 4 GHz*

### Electrical

- |                   |            |
|-------------------|------------|
| • Impedance       | 50 Ohms    |
| • Frequency Range | DC - 4 GHz |
| • VSWR            | 1.20:1 Max |

### Material

Note: All plating thickness values are in micro-inches.

- |               |  |
|---------------|--|
| • Body        | Brass (Plating: Tin-Zinc-Copper Alloy 100 over Copper 50)              |
| • Contact Pin | BeCu (Plating: Gold 4 over Nickel Phosphorus Allowy 80 over Copper 20) |
| • Insulator   | Teflon   |


The HASCO **HAD-BNCJ-TNCJ** is a general purpose BNC Female to TNC Female between-series adapter from HASCO. This between-series coaxial adapter will operate up to 4 GHz.


The HAD-BNCJ-TNCJ is RoHS compliant.



HASCO stocks an extensive selection of RF and Microwave between-series, in-series, right angle and low PIM adapters.

# BNC Female to TNC Female Adapter | DC ~ 4 GHz | Outline Drawing

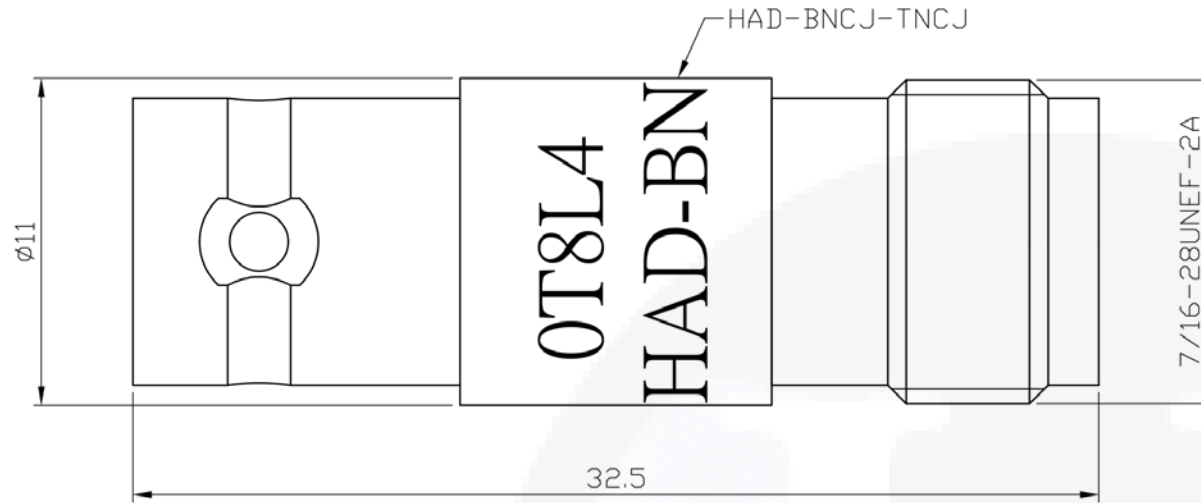

LTR	DESCRIPTION	DATE	APPR.	DRAWN BY: JMS	CHECKED BY: JMS	 5214 Bonsai Street • Moorpark, CA 93021 (888) 498-3242 • sales@hasco-inc.com <a href="http://www.hasco-inc.com">www.hasco-inc.com</a>			
-	RELEASE	07/21	TAC	APPROVED BY: TAC					
				THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HASCO COMPONENTS AND SHALL NOT BE REPRODUCED, COPIED NOR USED - IN WHOLE OR IN PART - AS THE BASIS FOR THE MANUFACTURE OR SALE OF OTHER ITEMS WITHOUT THE EXPRESS, WRITTEN PERMISSION OF HASCO COMPONENTS.		MATERIALS:	CAGE CODE:	SCALE:	SIZE:
						SEE DATA SHEET	0T8L4	N/A	A
						FINISHES:	PART NO./DRAWING NO.		REV:
						SEE DATA SHEET	HAD-BNCJ-TNCJ		-
THIS DRAWING IS A CONTROLLED DOCUMENT									