




**HASCO, INC**  
COMPONENTS DISTRIBUTOR

5214 Bonsai Street • Moorpark, CA 93021  
(888) 498-3242 • sales@hasco-inc.com  
www.hasco-inc.com

## SMA Male to Female Adapter • DC to 18 GHz To Replace Attenuator at 0dB

**Part No: 2082-PJ-SMA**

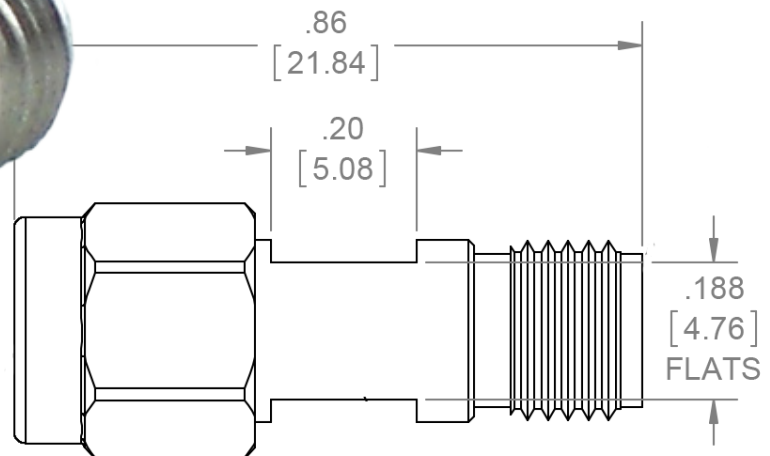

SMA MALE IAW  
MIL-PRF-39012 AND  
MIL-STD-348

SMA FEMALE IAW  
MIL-PRF-39012 AND  
MIL-STD-348

### Electrical

- **Frequency Range** DC - 18 GHz
- **VSWR** DC - 18 GHz.....1.15:1
- **Impedance** 50 Ohms
- **Operating Temperature Range** -65°C to +125°C
- **Power Peak or Avg** <50 Watts CW / <2kW Peak

### Materials

- **Inner Conductor**  
Gold Plated BeCu
- **Outer Conductor**  
Passivated Stainless Steel
- **Dielectric**  
Teflon