

Part No:

HAD-SMAJ-MMCXP



SMA Female to MMCX Male General Purpose Adapter - 6 GHz

Electrical

• Impedance	50 Ohms
• Frequency Range	DC - 6 GHz
• VSWR	1.20:1 Max

Material

Note: All plating thickness values are in micro-inches.

• Body & Coupling Nut	Brass (Plating: Gold 4 over Nickel Phosphorous Alloy 80 over Copper 20)
• Contact Pin	Brass (Plating: Gold 4 over Nickel Phosphorous Alloy 80 over Copper 20)
• Retainer Ring	BeCu (Plating: Tin-Zinc-Copper Alloy 100 over Copper 50)
• Insulator	Teflon
• Gasket	Silicone

The HASCO **HAD-SMAJ-MMCXP** is a general purpose SMA Female to MMCX Male between-series adapter from HASCO. This between-series coaxial adapter will operate up to 6 GHz.


Adapters that have a male to female or plug to jack configuration are known as “connector savers.” Typically, a low loss or low VSWR adapter is placed on more expensive component connectors to prevent damage.


The HAD-SMAJ-MMCXP is RoHS compliant.



HASCO stocks an extensive selection of RF and Microwave between-series, in-series, right angle and low PIM adapters.

SMA Female to MMCX Male Adapter | DC ~ 6 GHz | Outline Drawing

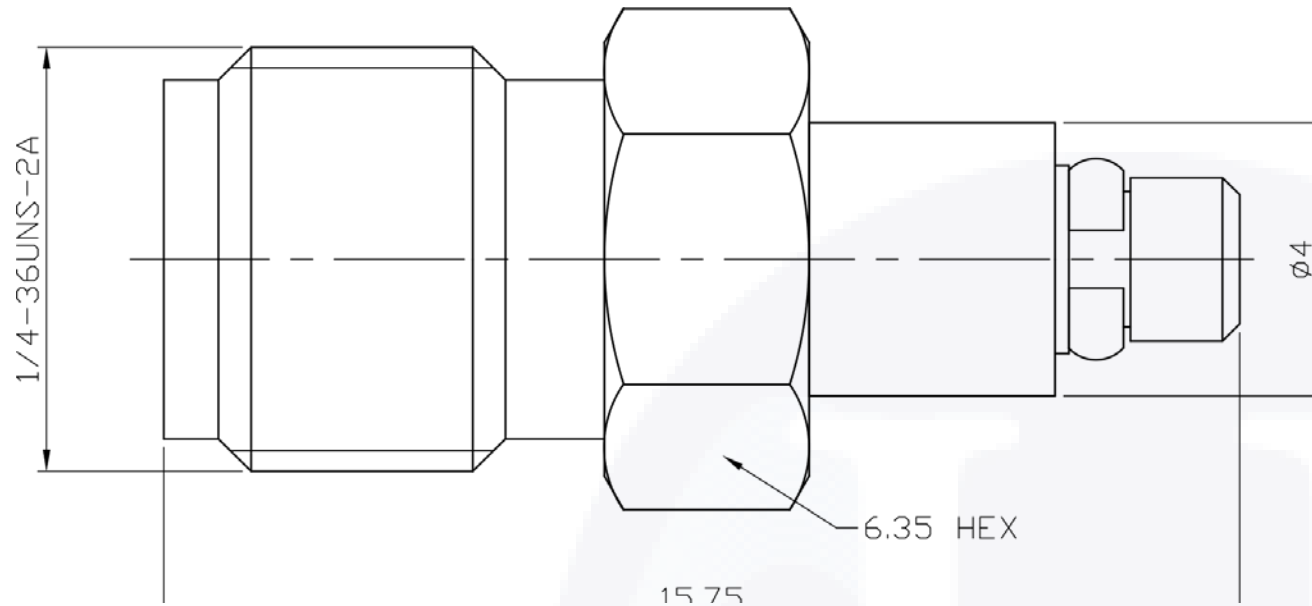

LTR	DESCRIPTION	DATE	APPR.	DRAWN BY: JMS	CHECKED BY: JMS	<div><div></div><div>HASCO, INC COMPONENTS DISTRIBUTOR</div></div> <div>5214 Bonsai Street • Moorpark, CA 93021 (888) 498-3242 • sales@hasco-inc.com www.hasco-inc.com</div>				
-	RELEASE	07/21	TAC	APPROVED BY: TAC						
				THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HASCO COMPONENTS AND SHALL NOT BE REPRODUCED, COPIED NOR USED - IN WHOLE OR IN PART - AS THE BASIS FOR THE MANUFACTURE OR SALE OF OTHER ITEMS WITHOUT THE EXPRESS, WRITTEN PERMISSION OF HASCO COMPONENTS.		MATERIALS:		CAGE CODE:	SCALE:	SIZE:
						SEE DATA SHEET	0T8L4	N/A	A	
						FINISHES:	PART NO./DRAWING NO.		REV:	
							SEE DATA SHEET	HAD-SMAJ-MMCXP		-
THIS DRAWING IS A CONTROLLED DOCUMENT										