

NOTES:


Materials: SST. corrosion-resistant, Non Magnetic 303, per ASTM A484 and A582. Beryllium Copper per ASTM-B-196, QQ-C-530
Oxide-Noryl (tm), MIL-P-46129

Finish: Center Conductors and solder components shall be plated per MIL-G-45204
Type II, Class 1 over Nickel plate per QQ-N-290.
Body and Body components shall be passivated per ASTM A380.

Frequency: DC-40 GHz

VSWR: 1.25 TO 40 GHz

Insertion Loss: $.05\sqrt{\text{Frequency}}$

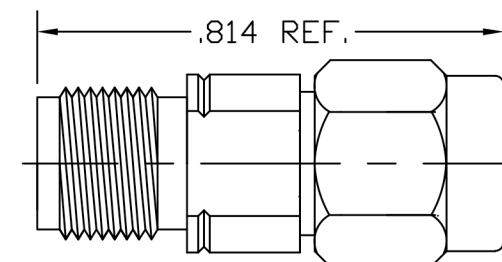

LTR	DESCRIPTION	DATE	APPR.	DRAWN	LMW	CHECKED	H HASCO, INC COMPONENTS DISTRIBUTOR 5214 Bonsai Street, Moorpark, CA 93021 (888) 498-3242 • www.hasco-inc.com														
—	REL	04/03		APPR.		SCALE															
				UNLESS OTHERWISE SPECIFIED: 1. REMOVE ALL BURRS 2. BREAK ALL CORNERS & EDGES .005 R. MAX 3. CHAMFER 1st & LAST THREADS 45° 4. SURFACE FINISHED 32✓UNLESS OTHERWISE SPECIFIED. 5. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN .002 T.I.R. 6. ALL DIMENSIONS ARE AFTER PLATING.			MATERIAL		TITLE 2.4mm JACK TO 2.9mm PLUG												
							FINISH														
							DIMENSIONS ARE IN INCHES TOLERANCES <table><tr><th>DECIMALS</th><th>FRACTIONAL</th><th>ANGULAR</th></tr><tr><td>.X ±.030</td><td rowspan="3">± 1/64</td><td>.X° ±1°0'</td></tr><tr><td>.XX ±.010</td><td>.X°X' ±15'</td></tr><tr><td>.XXX +.005</td></tr></table>		DECIMALS	FRACTIONAL	ANGULAR	.X ±.030	± 1/64	.X° ±1°0'	.XX ±.010	.X°X' ±15'	.XXX +.005	SIZE A	FSCM NO. 0T8L4	SHEET 1	DWG. NO. 24J-29P-FM
DECIMALS	FRACTIONAL	ANGULAR																			
.X ±.030	± 1/64	.X° ±1°0'																			
.XX ±.010		.X°X' ±15'																			
.XXX +.005																					