

NOTES:


Materials: SST. corrosion-resistant, Non Magnetic 303, per ASTM A484 and A582. Beryllium Copper per ASTM-B-196, QQ-C-530 Oxide-Noryl (tm), MIL-P-46129

Finish: Center Conductors and solder components shall be plated per MIL-G-45204 Type II, Class 1 over Nickel plate per QQ-N-290. Body and Body components shall be passivated per ASTM A380.

Frequency: DC-40 GHz

VSWR: 1.25 TO 40 GHz

Insertion Loss: $.05\sqrt{\text{Frequency}}$

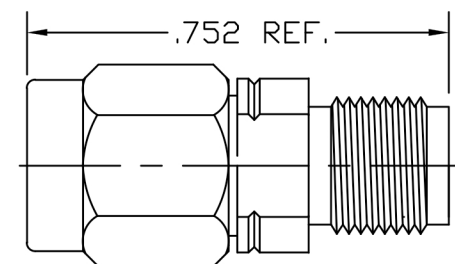

LTR	DESCRIPTION	DATE	APPR.	DRAWN LMW	CHECKED	 HASCO, INC COMPONENTS DISTRIBUTOR 5214 Bonsai Street, Moorpark, CA 93021 (888) 498-3242 • www.hasco-inc.com										
—	REL	04/03		APPR.	SCALE											
				UNLESS OTHERWISE SPECIFIED: 1. REMOVE ALL BURRS 2. BREAK ALL CORNERS & EDGES .005 R. MAX 3. CHAMFER 1st & LAST THREADS 45° 4. SURFACE FINISHED 32✓UNLESS OTHERWISE SPECIFIED. 5. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN .002 T.I.R. 6. ALL DIMENSIONS ARE AFTER PLATING.		MATERIAL		TITLE 2.4mm PLUG TO 2.9mm JACK								
						FINISH										
						DIMENSIONS ARE IN INCHES TOLERANCES		SIZE	FSCM NO.	SHEET	DWG. NO.					
								<table><tr><td>DECIMALS</td><td>FRACTIONAL</td><td>ANGULAR</td></tr><tr><td>.X ±.030</td><td rowspan="3">± 1/64</td><td>.X° ±1°0'</td></tr><tr><td>.XX ±.010</td><td>.X°X' ±15'</td></tr><tr><td>.XXX ±.005</td></tr></table>	DECIMALS	FRACTIONAL	ANGULAR	.X ±.030	± 1/64	.X° ±1°0'	.XX ±.010	.X°X' ±15'
DECIMALS	FRACTIONAL	ANGULAR														
.X ±.030	± 1/64	.X° ±1°0'														
.XX ±.010		.X°X' ±15'														
.XXX ±.005																