

REVISION


REV. A	CZB	J LIAO
N/A		JUN-08-2015

RELEASE FOR PRODUCTION

NOTES:
1.ELECTRICAL:
1.1 IMPEDANCE: 50Ω
1.2 FREQUENCY RANGE: DC~18GHZ
1.3 VSWR: 1.15 MAX@18GHZ
2.ENVIRONMENTAL:
TEMPERATURE RANGE: -65°C TO +165°C
3. MECHANICAL:
DURABILITY: 1000 CYCLES
4. MATERIAL AND FINISH:
BODY: STAINLESS STEEL, PASSIVATED
CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATED
DIELECTRIC: PEI, NATURAL

DESIGNED & DIMENSIONED
IN MILLIMETERS[INCHES]

 THIS PRODUCT MANUFACTURED
WITH LEAD-FREE PROCESSING

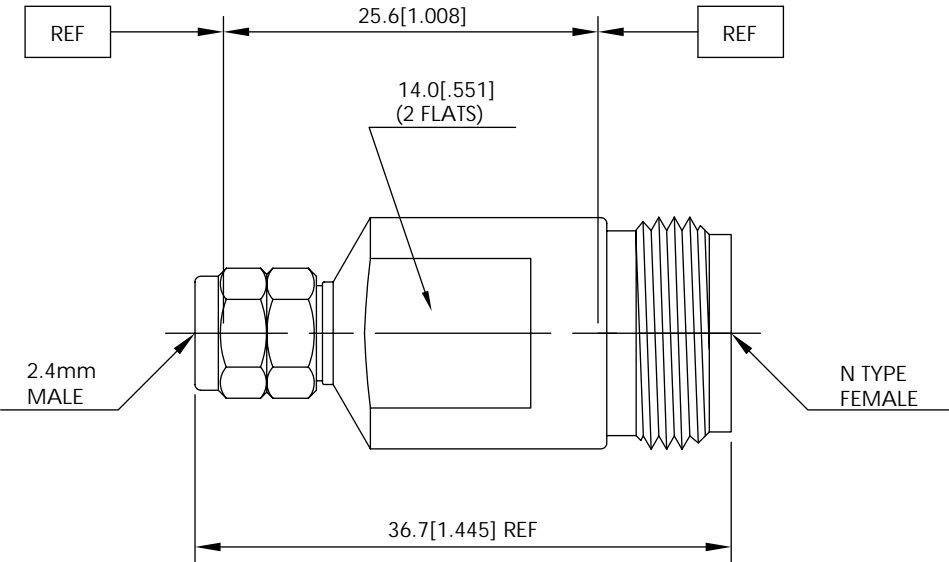

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY


UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN MILLIMETERS.
AND TOLERANCES ARE:
DECIMALS ANGLES
X.X: ±0.25 [.0100] ±3°
X.XX: ±0.05 [.0020]
X.XXX: ±0.025 [.0010]

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
Micable, INC. AND SHALL NOT BE REPRODUCED
OR TRANSFERRED TO OTHER DOCUMENTS OR
DISCLOSED TO OTHERS OR USED FOR ANY
PURPOSE OTHER THAN THAT WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED WRITTEN
CONSENT OF Micable, INC.



5214 Bonsai Street, Moorpark, CA 93021
(888) 498-3242 • www.hasco-inc.com

DRAWN: CZB	DATE: JUN-08-2015
REVIEWED: J LIAO	DATE: JUN-08-2015
APPROVED: J LIAO	DATE: JUN-08-2015
REFERENCE: N/A	
CAGE CODE: OT8L4	

DESCRIPTION: 2.4 MALE TO N TYPE FEMALE ADAPTOR, 50 OHMS
DWG. NO. 24P-NJ-MF
 SCALE: 4:1 REV. A SHEET 2 OF 2