

REVISION

REV. A	CZB	J LIAO
N/A		JUN-08-2015

RELEASE FOR PRODUCTION

NOTES:

1.ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 FREQUENCY RANGE: DC~18GHZ
- 1.3 VSWR: 1.15 MAX@18GHZ

2.ENVIRONMENTAL:

TEMPERATURE RANGE: -65°C TO +165°C

3. MECHANICAL:

DURABILITY: 1000 CYCLES

4. MATERIAL AND FINISH:

BODY: STAINLESS STEEL, PASSIVATED


CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATED

DIELECTRIC: PEI, NATURAL

DESIGNED & DIMENSIONED
IN MILLIMETERS[INCHES]



THIS PRODUCT MANUFACTURED
WITH LEAD-FREE PROCESSING

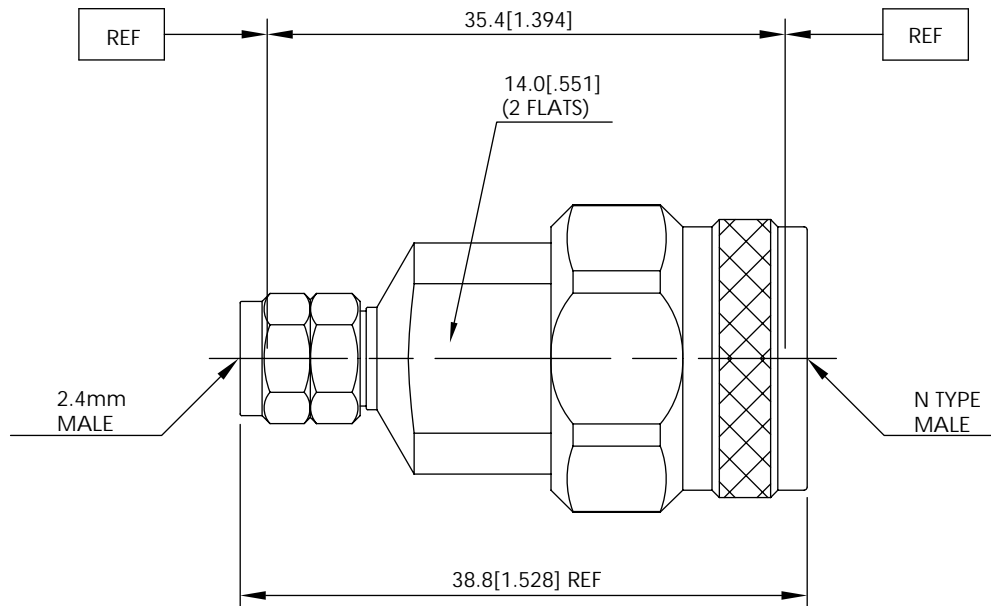

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN MILLIMETERS.
AND TOLERANCES ARE:

DECIMALS	ANGLES
X.X: ±0.25 [.0100]	±3°
X.XX: ±0.05 [.0020]	
X.XXX: ±0.025 [.0010]	

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
Micable, INC. AND SHALL NOT BE REPRODUCED
OR TRANSFERRED TO OTHER DOCUMENTS OR
DISCLOSED TO OTHERS OR USED FOR ANY
PURPOSE OTHER THAN THAT WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED WRITTEN
CONSENT OF Micable, INC.



HASCO, INC
COMPONENTS DISTRIBUTOR

5214 Bonsai Street, Moorpark, CA 93021
(888) 498-3242 • www.hasco-inc.com

DRAWN: CZB

DATE: JUN-08-2015

REVIEWED: J LIAO

DATE: JUN-08-2015

APPROVED: J LIAO

DATE: JUN-08-2015

REFERENCE: N/A

CAGE CODE: OT8L4

DESCRIPTION: 2.4 MALE TO N TYPE MALE ADAPTOR,
50 OHMS

DWG. NO.

24P-NP-MM



SCALE: 4:1

REV. A

SHEET 2 OF 2