

Part No:

# BPF-WZ1-4764-22-8-187



## WR-187 C-Band Band-Pass Filter • 4.75-4.78 GHz


The BPF-WZ1-4764-22-8-187 is a C-Band Band Pass Filter with super low insertion loss. It is an 8 section filter with 0.5 dB insertion loss even with the narrow bandwidth of 0.6%. Input and output are CPR WR-187.

### Key Features of the PF-WZ1-4764-22-8-187:

- Super Low Insertion Loss
- Very High Power Handling

### Parameters

Pass-Band Frequency	4.75 - 4.78 GHz
Insertion Loss	<0.5 dB @ Fc
Insertion Loss Flatness	<0.2 dB
Return Loss	>21 dB
Rejection @ 4.72 GHz	>80dB
Rejection @ 4.8 GHz	>80dB
Operating Temperature	-50°C to +85°C
Material	Silver Plated Aluminum 6061
Weight	30 lbs

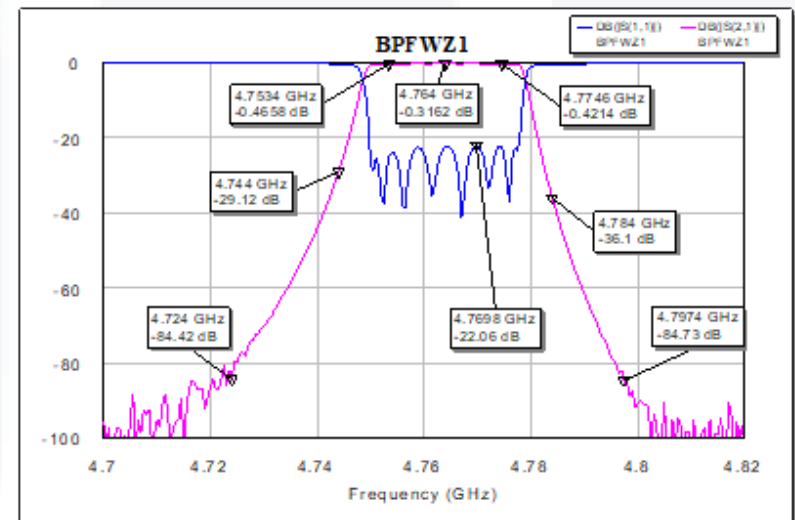

To view online, go to: <https://www.hasco-inc.com/filters/wr-187-c-band-band-pass-filter-low-insertion-loss-4-75-4-78-ghz/>