

NOTES:


Materials: SST. corrosion-resistant, Non Magnetic 303, per ASTM A484 and A582. Beryllium Copper per ASTM-B-196, QQ-C-530
Rexolite 1422

Finish: Center Conductors and solder components shall be plated per MIL-G-45204 Type II, Class 1 over Nickel plate per QQ-N-290.
Body and Body components shall be passivated per ASTM A380.

Frequency: DC-34.5 GHz

VSWR: 1.25 TO 34.5 GHz

Insertion Loss: .05√Frequency

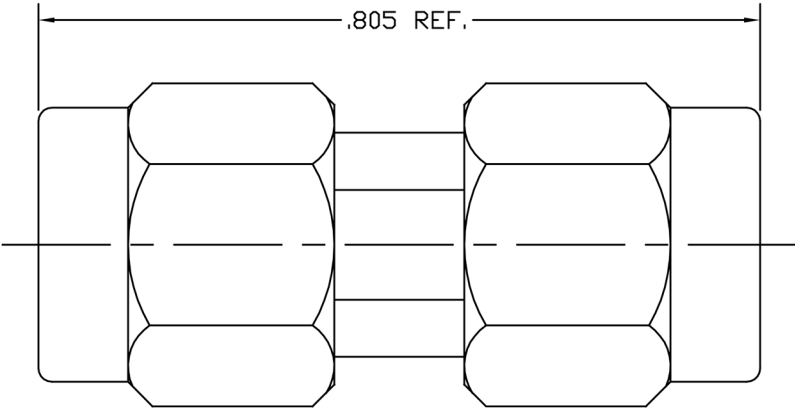

LTR	DESCRIPTION	DATE	APPR.	DRAWN <i>LMW</i>	CHECKED	H HASCO, INC COMPONENTS DISTRIBUTOR 5214 Bonsai Street, Moorpark, CA 93021 (888) 498-3242 • www.hasco-inc.com	
—	REL	05/03		APPR.	SCALE		
				UNLESS OTHERWISE SPECIFIED: 1. REMOVE ALL BURRS 2. BREAK ALL CORNERS & EDGES .005 R. MAX 3. CHAMFER 1st & LAST THREADS 45° 4. SURFACE FINISHED 32/ UNLESS OTHERWISE SPECIFIED. 5. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN .002 T.I.R. 6. ALL DIMENSIONS ARE AFTER PLATING.		MATERIAL	TITLE
						FINISH	3.5mm PLUG TO 3.5mm PLUG
						SIZE	
						FSCM NO.	
						SHEET	
				DIMENSIONS ARE IN INCHES TOLERANCES		DWG. NO.	
				DECIMALS	FRACTIONAL	ANGULAR	
				.X ±.030		.X° ±1°0'	
				.XX ±.010	± 1/64	.X°X' ±15'	
				.XXX +.005			
						A	0T8L4
						1	35P-35P-MM