


Part No:

HAD-BNCJ-BNCJ-T

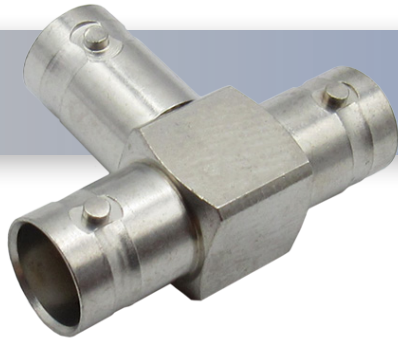

BNC Female to BNC Female to BNC Female General Purpose T Adapter

Electrical

- Impedance 50 Ohms
- Frequency Range Non-Matched 3dB Divider for Low Frequency Applications
- VSWR $\leq 2.0:1$ MAX When Terminated 50 Ω

Material

Note: All plating thickness values are in micro-inches.

- Body Brass (Plating: Tin-Zinc-CopperAlloy 100 over Copper 50)
- Contact Pin Phosphor Bronze (Plating: Gold 4 over Nickel-Phosphorous Alloy 80 over Copper 20)
- Lock Washer BeCu (Plating: Gold 4 over Nickel Phosphorous Alloy 80 over Copper 20)
- Insulator Brass (Plating: Tin-Zinc-CopperAlloy 100 over Copper 50)


The HASCO **HAD-BNCJ-BNCJ-T** is a general purpose BNC Female In-series T adapter from HASCO.


The HAD-BNCJ-BNCJ-T is RoHS compliant.



HASCO stocks an extensive selection of RF and Microwave between-series, in-series, right angle and low PIM adapters.

BNC Female to BNC Female to BNC Female T Adapter | Low Frequency | Outline Drawing

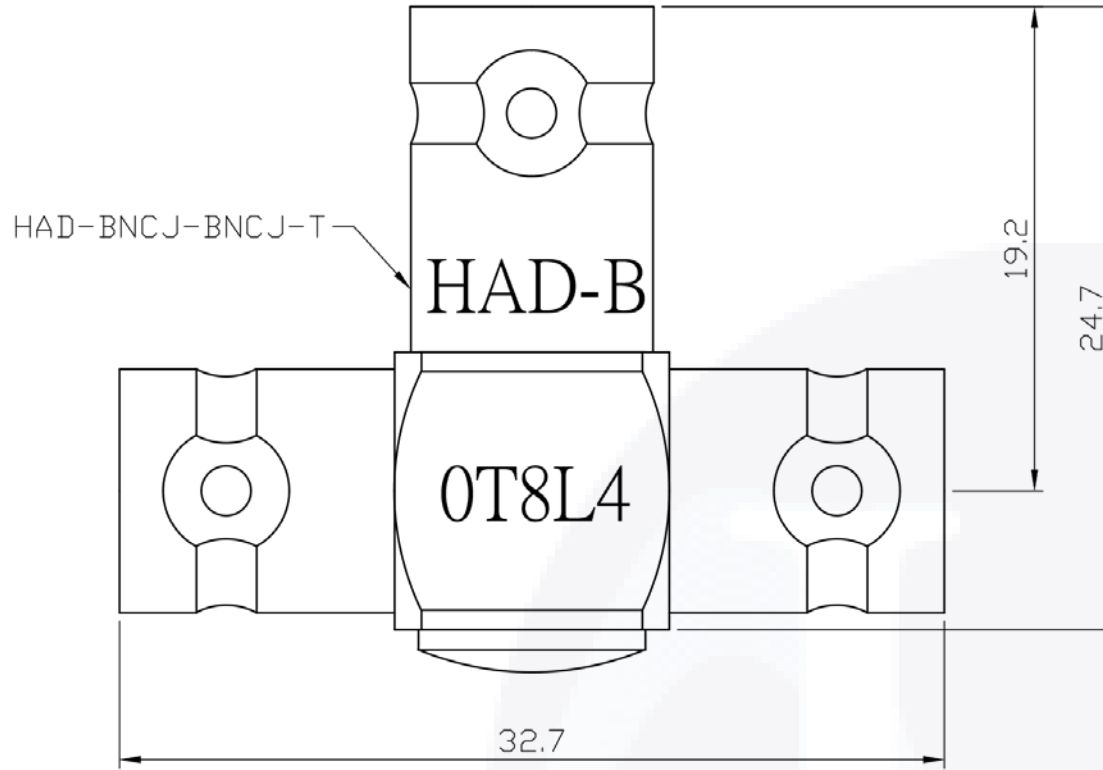

LTR	DESCRIPTION	DATE	APPR.	DRAWN BY: <i>JMS</i>	CHECKED BY: <i>JMS</i>		5214 Bonsai Street • Moorpark, CA 93021 (888) 498-3242 • sales@hasco-inc.com www.hasco-inc.com			
-	RELEASE	07/21	TAC	APPROVED BY: <i>TAC</i>						
				THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HASCO COMPONENTS AND SHALL NOT BE REPRODUCED, COPIED NOR USED - IN WHOLE OR IN PART - AS THE BASIS FOR THE MANUFACTURE OR SALE OF OTHER ITEMS WITHOUT THE EXPRESS, WRITTEN PERMISSION OF HASCO COMPONENTS.			MATERIALS:	CAGE CODE:	SCALE:	SIZE:
							SEE DATA SHEET	0T8L4	N/A	A
							FINISHES:	PART NO./DRAWING NO.		REV:
							SEE DATA SHEET	HAD-BNCJ-BNCJ-T		-
THIS DRAWING IS A CONTROLLED DOCUMENT										