Part No: HAD-SMAP-SMPJ





The HASCO **HAD-SMAP-SMPJ** is a general purpose SMA Male to SMP Female between-series adapter from HASCO. This betweenseries coaxial adapter will operate up to 27 GHz.

Adapters that have a male to female or plug to jack configuration are known as "connector savers." Typically, a low loss or low VSWR adapter is placed on more expensive component connectors to prevent damage.


The HAD-SMAP-SMPJ is RoHS compliant.



HASCO stocks an extensive selection of RF and Microwave between-series, in-series, right angle and low PIM adapters.

SMA Male to SMP Female General Purpose Adapter - 27 GHz

Electrical	
Impedence	50 Ohms
Frequency Range	DC - 27 GHz
• VSWR	1.15:1 Max
Temperature Range	-55°C to +105°C
• Matings	≥500
Material	Note: All plating thickness values are in micro-inches.
SMA Body & Coupling Nut	Passivated Stainless Steel
• SMP Body	BeCu (Plating: Gold 4 over Nickel-Phosphorus Alloy 80 over Copper 20)
• Ring	Brass (Plating: Gold 4 over Nickel-Phosphorus Alloy 80 over Copper 20)
Contact Pin	BeCu (Plating: Gold 4 over Nickel-Phosphorus Alloy 80 over Copper 20)
Retainer Ring	Brass (Plating: Tin-Zinc-Copper Alloy 100 over Copper 50)
• Insulator	Teflon (SMA), PPO (SMP)
• Gasket	Silicon

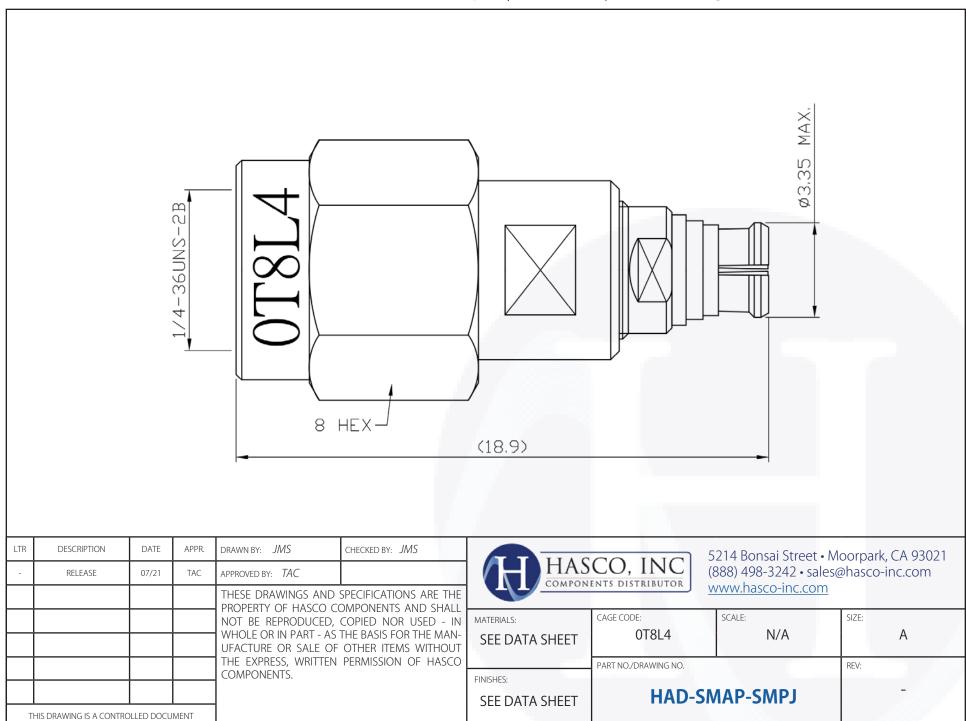

© 2021 HASCO COMPONENTS