

Part No:

HAD-SMBP-SMBJ



SMB Male to SMB Female General Purpose Adapter - 4 GHz

Electrical

- | | |
|-------------------|------------|
| • Impedance | 50 Ohms |
| • Frequency Range | DC - 4 GHz |
| • VSWR | 1.20:1 Max |

Material

Note: All plating thickness values are in micro-inches.

- | | |
|-----------------------|--|
| • Body & Coupling Nut | Brass (Plating: Gold 4 over Nickel Phosphorus Alloy 80 over Copper 20) |
| • Contact Pin | BeCu (Plating: Gold 4 over Nickel Phosphorus Alloy 80 over Copper 20) |
| • Insulator | Teflon |

The HASCO **HAD-SMBP-SMBJ** is a general purpose SMB Male to SMB Female in-series adapter from HASCO. This in-series coaxial adapter will operate up to 4 GHz.


Adapters that have a male to female or plug to jack configuration are known as “connector savers.” Typically, a low loss or low VSWR adapter is placed on more expensive component connectors to prevent damage.


The HAD-SMBP-SMBJ is RoHS compliant.



HASCO stocks an extensive selection of RF and Microwave between-series, in-series, right angle and low PIM adapters.

SMB Male to SMB Female Adapter | DC ~ 4 GHz | Outline Drawing

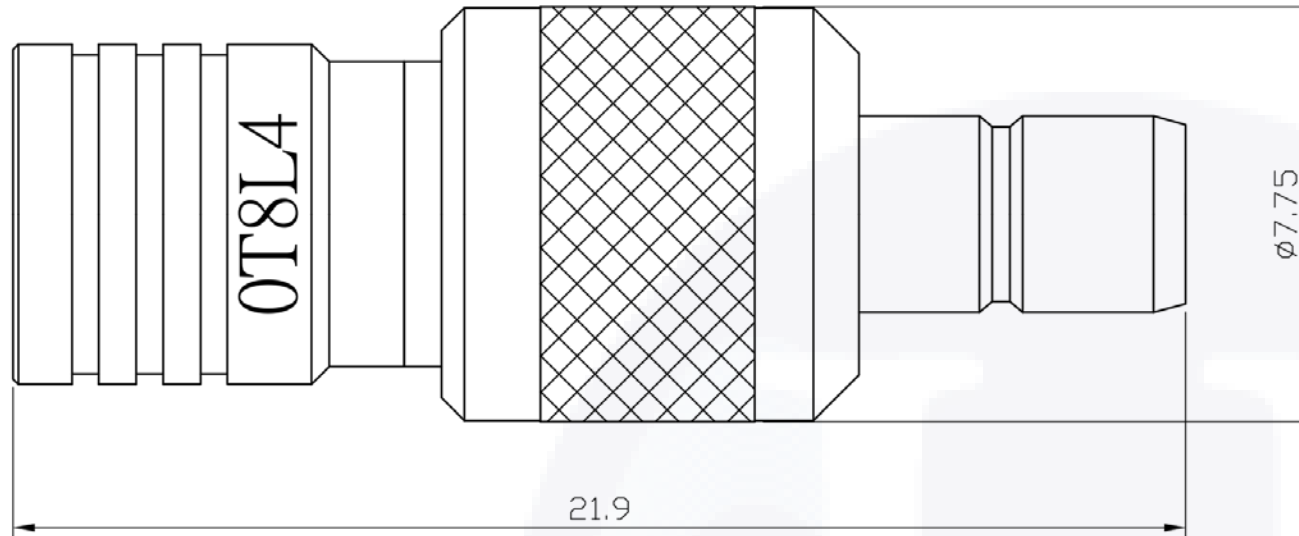

LTR	DESCRIPTION	DATE	APPR.	DRAWN BY: JMS	CHECKED BY: JMS	<div><div></div><div>HASCO, INC COMPONENTS DISTRIBUTOR</div></div> <div>5214 Bonsai Street • Moorpark, CA 93021 (888) 498-3242 • sales@hasco-inc.com www.hasco-inc.com</div>			
-	RELEASE	07/21	TAC	APPROVED BY: TAC					
				THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HASCO COMPONENTS AND SHALL NOT BE REPRODUCED, COPIED NOR USED - IN WHOLE OR IN PART - AS THE BASIS FOR THE MANUFACTURE OR SALE OF OTHER ITEMS WITHOUT THE EXPRESS, WRITTEN PERMISSION OF HASCO COMPONENTS.		MATERIALS:	CAGE CODE:	SCALE:	SIZE:
						SEE DATA SHEET	0T8L4	N/A	A
						FINISHES:	PART NO./DRAWING NO.		REV:
						SEE DATA SHEET	HAD-SMBP-SMBJ		-
THIS DRAWING IS A CONTROLLED DOCUMENT									