


Part No:

# HAD-BNCP-BNCP

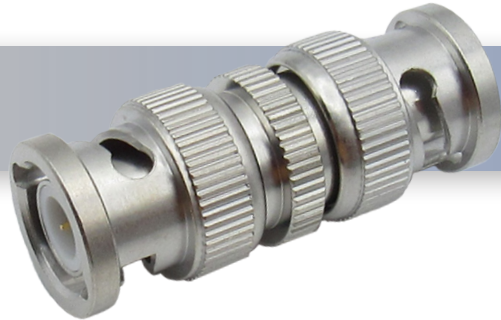

## *BNC Male to BNC Male General Purpose Adapter - 4 GHz*

### Electrical

- Impedance 50 Ohms
- Frequency Range DC - 4 GHz
- VSWR 1.20:1 Max

### Material

Note: All plating thickness values are in micro-inches.

- BNC Body & Coupling Nut BeCu (Plating: Tin-Zinc-Copper Alloy 100 over Copper 50)
- Contact Pin BeCu (Plating: Gold 10 over Nickel 50 over Copper 50)
- Spring SK 5 (Plating: Tin-Zinc-Copper Alloy 100 over Copper 50)
- Washer Brass(Plating: Tin-Zinc-Copper Alloy 100 over Copper 50)
- Insulator Teflon
- Gasket Silicon


The HASCO **HAD-BNCP-BNCP** is a general purpose BNC Male to BNC Male in-series adapter from HASCO. This in-series coaxial adapter will operate up to 4 GHz.

The HAD-BNCP-BNCP is RoHS compliant.



HASCO stocks an extensive selection of RF and Microwave between-series, in-series, right angle and low PIM adapters.

BNC Male to BNC Male Adapter | DC ~ 4 GHz | Outline Drawing

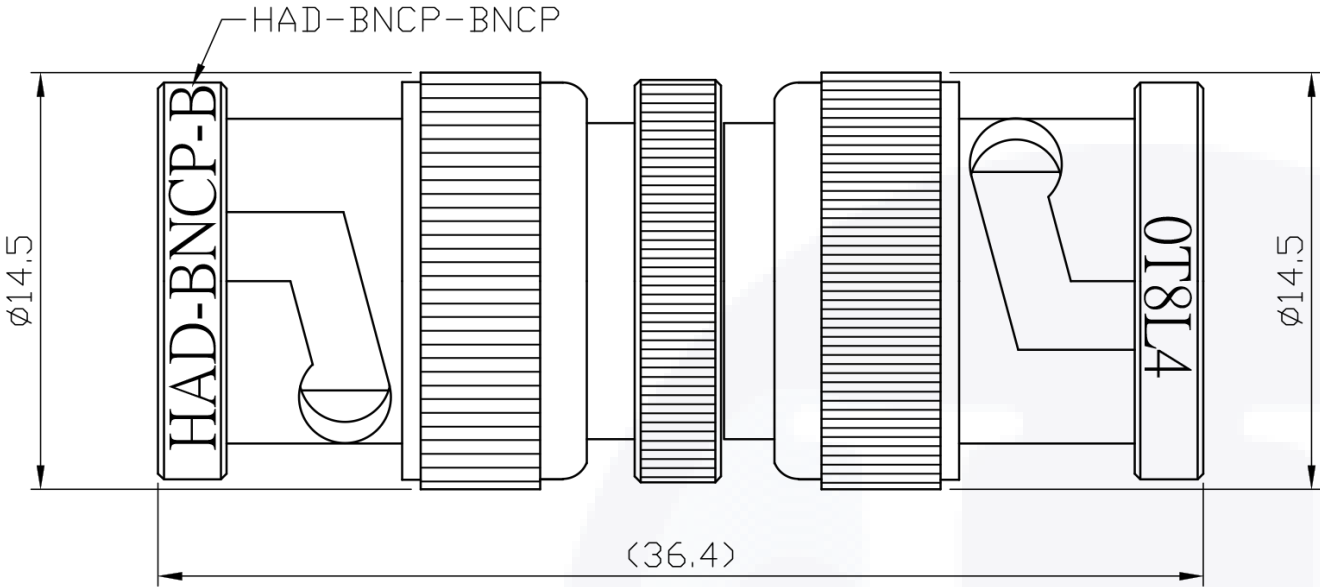

LTR	DESCRIPTION	DATE	APPR.	DRAWN BY: JMS	CHECKED BY: JMS
-	RELEASE	07/21	TAC	APPROVED BY: TAC	
				THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HASCO COMPONENTS AND SHALL NOT BE REPRODUCED, COPIED NOR USED - IN WHOLE OR IN PART - AS THE BASIS FOR THE MANUFACTURE OR SALE OF OTHER ITEMS WITHOUT THE EXPRESS, WRITTEN PERMISSION OF HASCO COMPONENTS.	
THIS DRAWING IS A CONTROLLED DOCUMENT					



5214 Bonsai Street • Moorpark, CA 93021  
 (888) 498-3242 • sales@hasco-inc.com  
[www.hasco-inc.com](http://www.hasco-inc.com)

MATERIALS: SEE DATA SHEET	CAGE CODE: 0T8L4	SCALE: N/A	SIZE: A
FINISHES: SEE DATA SHEET	PART NO./DRAWING NO. <b>HAD-BNCP-BNCP</b>		REV: -