

Part No:

# HAD-SSMAP-SSMAP



## *SSMA Male to SSMA Male General Purpose Adapter - 27 GHz*

### Electrical

- Impedance 50 Ohms
- Frequency Range DC - 27 GHz
- VSWR 1.20:1 Max

### Material

Note: All plating thickness values are in micro-inches.

- Body & Coupling Nut Passivated Stainless Steel
- Contact Pin Brass (Plating: Gold 4 over Nickel Phosphorous Alloy 80 over Copper 20)
- Retainer Ring BeCu (Plating: Tin-Zinc Alloy 100 over Copper 50)
- Gasket Silicone
- Insulator Teflon


The HASCO **HAD-SSMAP-SSMAP** is a general purpose SSMA Male to SSMA Male in-series adapter from HASCO. This in-series coaxial adapter will operate up to 27 GHz.


The HAD-SSMAP-SSMAP is RoHS compliant.



HASCO stocks an extensive selection of RF and Microwave between-series, in-series, right angle and low PIM adapters.

SSMA Male to SSMA Male Adapter | DC ~ 27 GHz | Outline Drawing

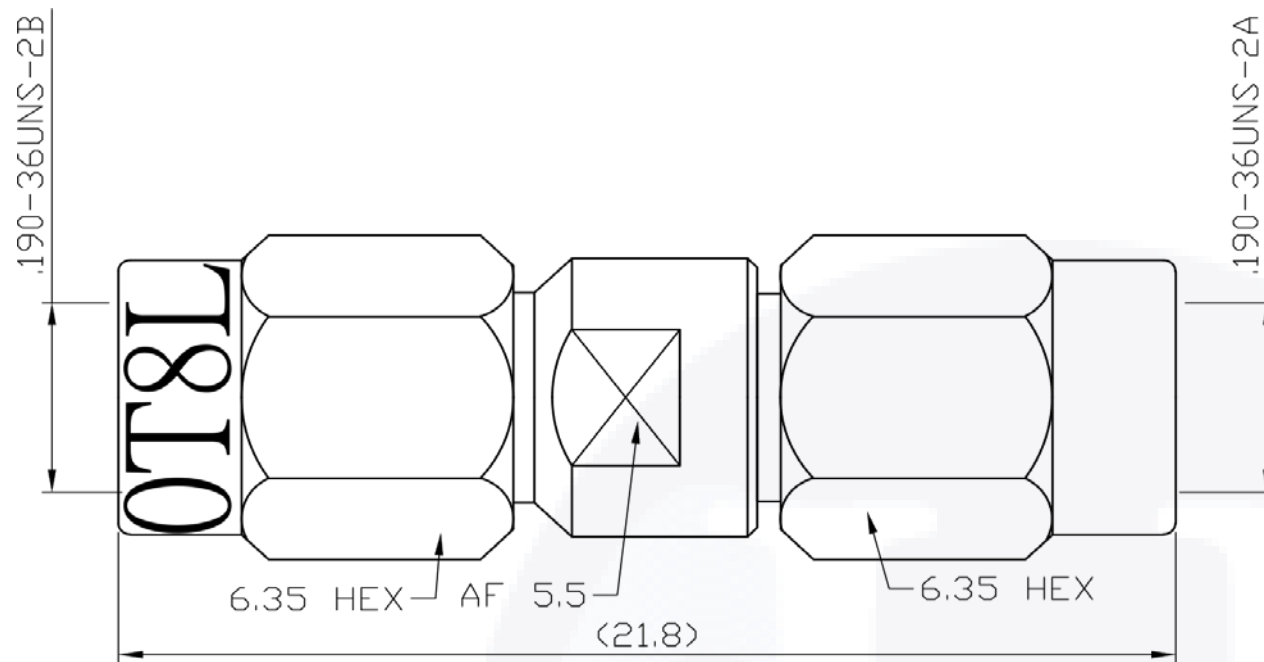

LTR	DESCRIPTION	DATE	APPR.	DRAWN BY: JMS	CHECKED BY: JMS	 <p>5214 Bonsai Street • Moorpark, CA 93021 (888) 498-3242 • sales@hasco-inc.com <a href="http://www.hasco-inc.com">www.hasco-inc.com</a></p>					
-	RELEASE	07/21	TAC	APPROVED BY: TAC							
				THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HASCO COMPONENTS AND SHALL NOT BE REPRODUCED, COPIED NOR USED - IN WHOLE OR IN PART - AS THE BASIS FOR THE MANUFACTURE OR SALE OF OTHER ITEMS WITHOUT THE EXPRESS, WRITTEN PERMISSION OF HASCO COMPONENTS.							
				MATERIALS:	SEE DATA SHEET	CAGE CODE:	OT8L4	SCALE:	N/A	SIZE:	A
				FINISHES:	SEE DATA SHEET	PART NO./DRAWING NO.	<b>HAD-SSMAP-SSMAP</b>		REV:	-	
THIS DRAWING IS A CONTROLLED DOCUMENT											