

Part No:

HAD-SMAJ-MCXP



SMA Female to MCX Male General Purpose Adapter - 6 GHz

Electrical

• Impedance	50 Ohms
• Frequency Range	DC - 6 GHz
• VSWR	1.20:1 Max
• Temperature Range	-55°C to +155°C
• Matings	≥500 (MCX) ≥100 (SMA)

Material

Note: All plating thickness values are in micro-inches.

• SMA Body	Brass (Plating: Gold 4 over Nickel-Phosphorus Alloy 80 over Copper 20)
• MCX Body	BeCu (Plating: Gold 4 over Nickel-Phosphorus Alloy 80 over Copper 20)
• Contact Pin	BeCu (Plating: Gold 4 over Nickel-Phosphorus Alloy 80 over Copper 20)
• Insulator	Teflon


The HASCO **HAD-SMAJ-MCXP** is a general purpose SMA Female to MCX Male between-series adapter from HASCO. This between-series coaxial adapter will operate up to 6 GHz.


Adapters that have a male to female or plug to jack configuration are known as “connector savers.” Typically, a low loss or low VSWR adapter is placed on more expensive component connectors to prevent damage.

The HAD-SMAJ-MCXP is RoHS compliant.



HASCO stocks an extensive selection of RF and Microwave between-series, in-series, right angle and low PIM adapters.

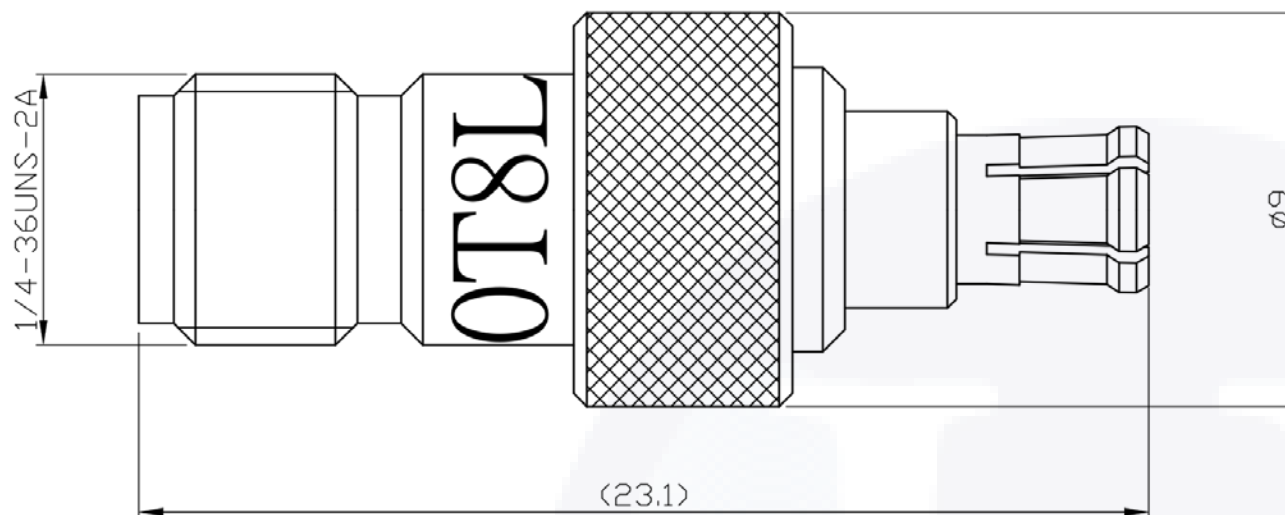

LTR	DESCRIPTION	DATE	APPR.	DRAWN BY: JMS	CHECKED BY: JMS	<div><div><div>HASCO, INC</div><div>COMPONENTS DISTRIBUTOR</div></div><div>5214 Bonsai Street • Moorpark, CA 93021 (888) 498-3242 • sales@hasco-inc.com www.hasco-inc.com</div></div>					
-	RELEASE	07/21	TAC	APPROVED BY: TAC							
				THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HASCO COMPONENTS AND SHALL NOT BE REPRODUCED, COPIED NOR USED - IN WHOLE OR IN PART - AS THE BASIS FOR THE MANUFACTURE OR SALE OF OTHER ITEMS WITHOUT THE EXPRESS, WRITTEN PERMISSION OF HASCO COMPONENTS.		MATERIALS:		CAGE CODE:	SCALE:	SIZE:	
						SEE DATA SHEET		OT8L4	N/A	A	
						FINISHES:		PART NO./DRAWING NO.		REV:	
						SEE DATA SHEET		HAD-SMAJ-MCXP		-	
THIS DRAWING IS A CONTROLLED DOCUMENT											