## **HAD-TNCP-TNCP**





The HASCO **HAD-TNCP-TNCP** is a general purpose TNC Male to TNC Male in-series adapter from HASCO. This in-series coaxial adapter will operate up to 11 GHz.

The HAD-TNCP-TNCP is RoHS compliant.



HASCO stocks an extensive selection of RF and Microwave betweenseries, in-series, right angle and low PIM adapters.

## TNC Male to TNC Male General Purpose Adapter - 11 GHz

## **Electrical**

• Impedence 50 Ohms

• Frequency Range DC - 11 GHz

• VSWR 1.20:1 Max

• Operating Temperature -65°C to +165°C

Material

Note: All plating thickness values are in micro-inches.

• Body & Coupling Nut Brass (Plating: Tin-Zinc-Copper Alloy 100 over Copper 50)

• Washer Brass (Plating: Tin-Zinc-Copper Alloy 100 over Copper 50)


• Contact Pin BeCu (Plating: Gold 4 over Nickel Phosphorous Alloy 80 over Copper 20)

• Insulator Teflon

Gasket Silicone

• Spring SK5(Plating: Tin-Zinc-Copper Alloy 100 over Copper 50)

## **TNC Male to TNC Male Adapter** | DC $\sim$ 11 GHz | Outline Drawing

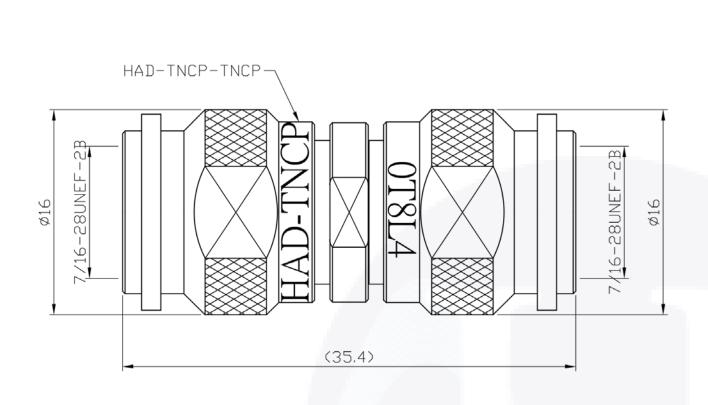

LTR	DESCRIPTION	DATE	APPR.	DRAWN BY: JMS	CHECKED BY: JMS	5214 Bonsai Street • Moorpark, CA 93021			
-	RELEASE	07/21	TAC	APPROVED BY: TAC		HASCO, INC (888) 498-3242 • sales@			
					SPECIFICATIONS ARE THE OMPONENTS AND SHALL		ENTS DISTRIBUTOR	www.hasco-inc.com	
				NOT BE REPRODUCED, WHOLE OR IN PART - AS	COPIED NOR USED - IN THE BASIS FOR THE MAN- OTHER ITEMS WITHOUT PERMISSION OF HASCO	SEE DATA SHEET FINISHES:	CAGE CODE:	SCALE:	SIZE:
							0T8L4	N/A	А
				THE EXPRESS, WRITTEN COMPONENTS.			PART NO./DRAWING NO.		REV:
				com onems.			HAD-TNCP-TNCP		
THIS DRAWING IS A CONTROLLED DOCUMENT						SEE DATA SHEET	TIAD THEI THEI		

Product specifications subject to change without notification.