# **HAD-SMAP-SMBJ**





The HASCO **HAD-SMAP-SMBJ** is a general purpose SMA Male to SMB (Sub-Miniature B) Female between-series adapter from HASCO. This between-series coaxial adapter will operate up to 4 GHz.

Adapters that have a male to female or plug to jack configuration are known as "connector savers." Typically, a low loss or low VSWR adapter is placed on more expensive component connectors to prevent damage.

The HAD-SMAP-SMBJ is RoHS compliant.



HASCO stocks an extensive selection of RF and Microwave betweenseries, in-series, right angle and low PIM adapters.

## SMA Male to SMB (Sub-Miniature B) Female General Purpose Adapter - 4 GHz

#### **Electrical**

Impedence 50 OhmsFrequency Range DC - 4 GHz

• VSWR 1.20:1 Max

#### Material

Note: All plating thickness values are in micro-inches.


• Body & Coupling Nut Brass (Plating: Gold 4 over Nickel Phosphorous Alloy 80 over Copper 20)

• Contact Pin Brass (Plating: Gold 4 over Nickel Phosphorous Alloy 80 over Copper 20)

• Insulator Teflon

Gasket Silicone

### SMA Male to SMB (Sub-Miniature B) Female Adapter | DC ~ 4 GHz | Outline Drawing

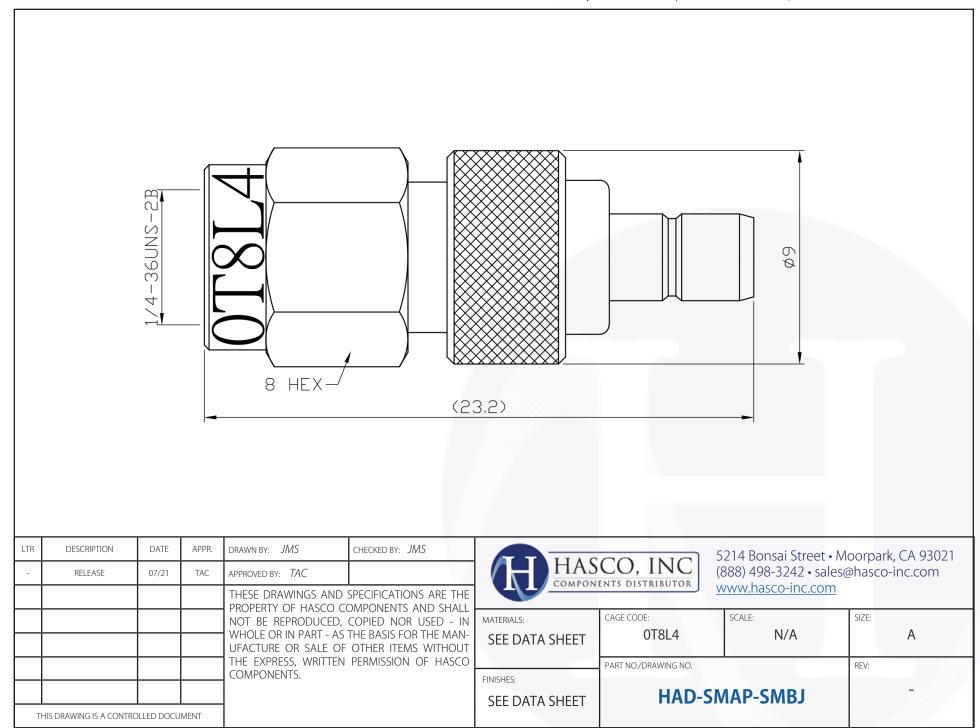

Product specifications subject to change without notification.

© 2021 HASCO COMPONENTS