

Part No:

NJ-35J-FF



Type N Female to 3.5mm Female Adapter - 18 GHz

Electrical

• Impedance	50 Ohms
• Frequency Range	DC - 18 GHz
• VSWR	1.15:1 Max
• Insertion Loss	$\leq 0.05 \times f(\text{GHz})$ dB
• Insulation Resistance	≥ 5000 M Ω
• Diel. Withstanding Voltage	1100 V rms @ Sea Level
• Working Voltage	335 V rms @ Sea Level
• Temperature Range	-65°C to 165°C

Material

• Body	Passivated Stainless Steel
• Insulator	Teflon
• Contact	BeCu (Plating: Gold 4 over Nickel-Phosphorus Alloy 80 over Copper 20)


The HASCO **NJ-35J-FF** is a general purpose Type N Female to 3.5mm Female between-series adapter from HASCO. This between-series coaxial adapter will operate up to 18 GHz.


The NJ-35J-FF is RoHS compliant.



HASCO stocks an extensive selection of RF and Microwave between-series, in-series, right angle and low PIM adapters.

Type N Female to 3.5mm Female Adapter | DC ~ 18 GHz | Outline Drawing

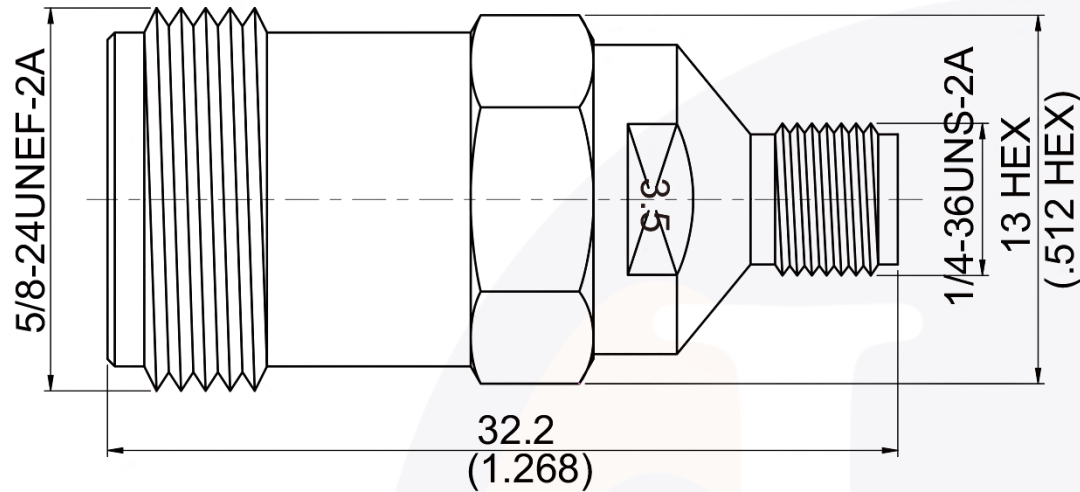

LTR	DESCRIPTION	DATE	APPR.	DRAWN BY: <i>NS</i>	CHECKED BY: <i>JMS</i>	 <p>5214 Bonsai Street • Moorpark, CA 93021 (888) 498-3242 • sales@hasco-inc.com www.hasco-inc.com</p>
-	RELEASE	10/22	TAC	APPROVED BY: <i>TAC</i>		
				THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HASCO COMPONENTS AND SHALL NOT BE REPRODUCED, COPIED NOR USED - IN WHOLE OR IN PART - AS THE BASIS FOR THE MANUFACTURE OR SALE OF OTHER ITEMS WITHOUT THE EXPRESS, WRITTEN PERMISSION OF HASCO COMPONENTS.		MATERIALS: SEE DATA SHEET
						CAGE CODE: OT8L4
						SCALE: N/A
						SIZE: A
						PART NO./DRAWING NO. NJ-35J-FF
						FINISHES: SEE DATA SHEET
						REV: -
THIS DRAWING IS A CONTROLLED DOCUMENT						