

NOTES:


MATERIALS: SST. CORROSION-RESISTANT, NON MAGNETIC 303, PER ASTM A484 AND A582. BERYLLIUM COPPER PER ASTM-B-196, QQ-C-530 OXIDE-NORYL (TM), MIL-P-46129

FINISH: CENTER CONDUCTORS AND SOLDER COMPONENTS SHALL BE PLATED PER MIL-G-45204 TYPE II, CLASS 1 OVER NICKEL PLATE PER QQ-N-290. BODY AND BODY COMPONENTS SHALL BE PASSIVATED PER ASTM A380.

FREQUENCY: DC-18 GHz

VSWR: 1.15 TO 18 GHz

INSERTION LOSS: $.05\sqrt{\text{Frequency}}$

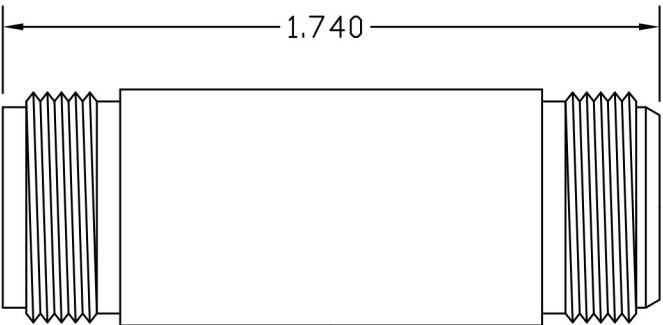

LTR	DESCRIPTION	DATE	APPR.	DRAWN	CHECKED	 HASCO, INC. COMPONENTS DISTRIBUTOR 5214 Bonsai Street, Moorpark, CA 93021 (888) 498-3242 • www.hasco-inc.com					
—	REL	02/03		APPR.	SCALE						
				UNLESS OTHERWISE SPECIFIED: 1. REMOVE ALL BURRS 2. BREAK ALL CORNERS & EDGES .005 R. MAX 3. CHAMFER 1st & LAST THREADS 45° 4. SURFACE FINISHED 32✓ UNLESS OTHERWISE SPECIFIED. 5. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN .002 T.I.R. 6. ALL DIMENSIONS ARE AFTER PLATING.		MATERIAL		TITLE N JACK TO N JACK ADAPTER			
						FINISH					
						DIMENSIONS ARE IN INCHES TOLERANCES		SIZE	FSCM NO.	SHEET	DWG. NO.
								DECIMALS .XX ±.030 .XX ±.010 .XXX +.005 FRACTIONAL ± 1/64 ANGULAR .X° ±1°0' .X°X' ±15'	A	0T8L4	1