

Part No:

NP-35J-MF



Type N Male to 3.5mm Female Adapter - 18 GHz

Electrical

• Impedance	50 Ohms
• Frequency Range	DC - 18 GHz
• VSWR	1.15:1 Max
• Insertion Loss	$\leq 0.05 \times f(\text{GHz})$ dB
• Insulation Resistance	≥ 5000 M Ω
• Diel. Withstanding Voltage	1100 V rms @ Sea Level
• Working Voltage	335 V rms @ Sea Level
• Temperature Range	-65°C to 165°C

Material

• Body & Coupling Nut	Passivated Stainless Steel
• Insulator	Teflon
• Contact Pin	BeCu (Plating: Gold 4 over Nickel-Phosphorus Alloy 80 over Copper 20)
• Retainer Ring	Brass (Plating: Tin-Zinc-Copper Alloy 100 over Copper 80)
• Gasket	Silicone


The HASCO **NP-35J-MF** is a general purpose Type N Male to 3.5mm Female between-series adapter from HASCO. This between-series coaxial adapter will operate up to 18 GHz.


The NP-35J-MF is RoHS compliant.



HASCO stocks an extensive selection of RF and Microwave between-series, in-series, right angle and low PIM adapters.

Type N Male to 3.5mm Female Adapter | DC ~ 18 GHz | Outline Drawing

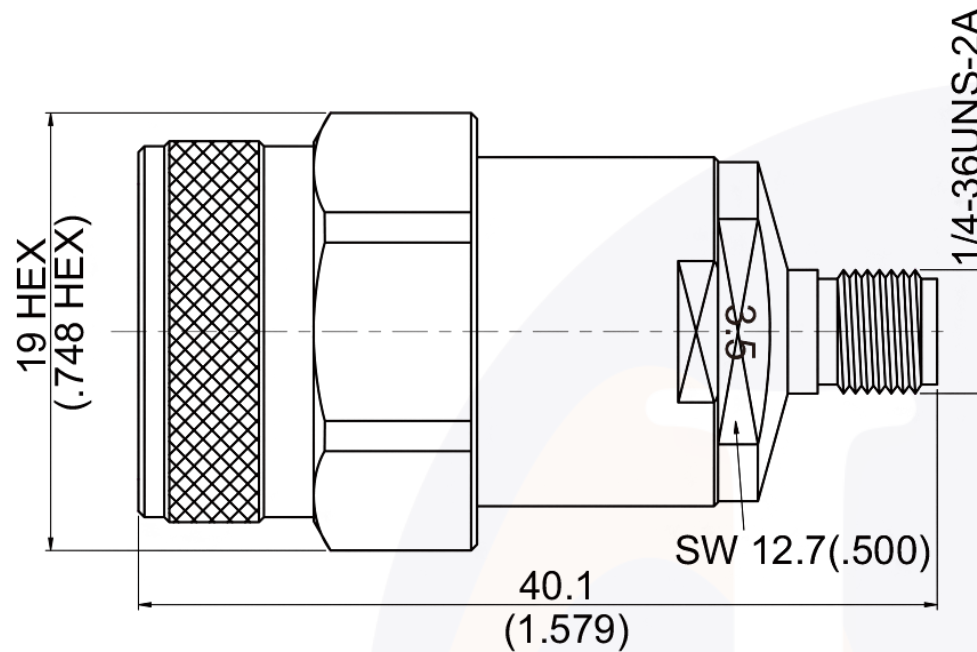

LTR	DESCRIPTION	DATE	APPR.	DRAWN BY: NS	CHECKED BY: JMS	<div><div>5214 Bonsai Street • Moorpark, CA 93021 (888) 498-3242 • sales@hasco-inc.com www.hasco-inc.com</div></div>			
-	RELEASE	10/22	TAC	APPROVED BY: TAC					
				THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HASCO COMPONENTS AND SHALL NOT BE REPRODUCED, COPIED NOR USED - IN WHOLE OR IN PART - AS THE BASIS FOR THE MANUFACTURE OR SALE OF OTHER ITEMS WITHOUT THE EXPRESS, WRITTEN PERMISSION OF HASCO COMPONENTS.		MATERIALS:	CAGE CODE:	SCALE:	SIZE:
						SEE DATA SHEET	0T8L4	N/A	A
						FINISHES:	PART NO./DRAWING NO.		REV:
						SEE DATA SHEET	NP-35J-MF		-
THIS DRAWING IS A CONTROLLED DOCUMENT									