

NOTES:


Materials: SST. corrosion-resistant, Non Magnetic 303, per ASTM A484 and A582. Beryllium Copper per ASTM-B-196, QQ-C-530
PTFE Fluorocarbon per ASTM-D-1710

Finish: Center Conductors and solder components shall be plated per MIL-G-45204 Type II, Class 1 over Nickel plate per QQ-N-290.
Body and Body components shall be passivated per ASTM A380.


Frequency: DC-18 GHz

VSWR: 1.15 TO 18 GHz

Insertion Loss: (dB) $.05\sqrt{\text{Frequency}}$

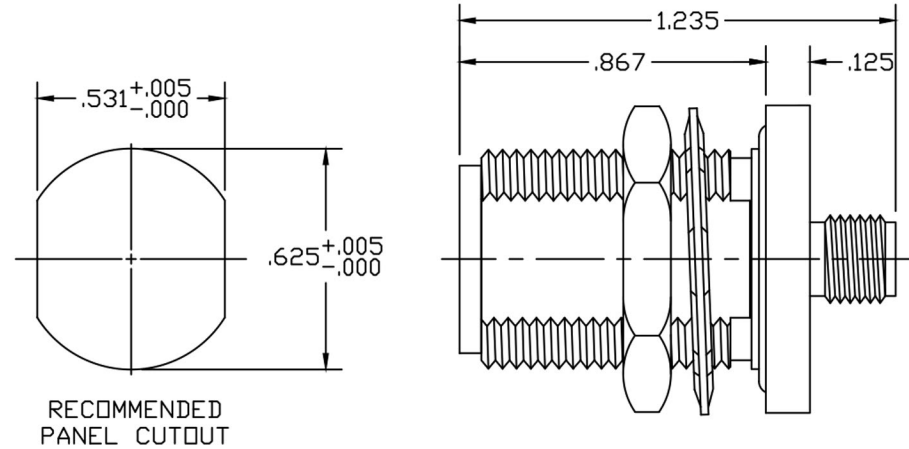

RECOMMENDED
PANEL CUTOUT

LTR	DESCRIPTION	DATE	APPR.	DRAWN LMW	CHECKED		5214 Bonsai Street, Moorpark, CA 93021 (888) 498-3242 • www.hasco-inc.com		
-	REL	02/03		APPR.	SCALE		MATERIAL	TITLE N JACK TO SMA JACK	
				UNLESS OTHERWISE SPECIFIED: 1. REMOVE ALL BURRS 2. BREAK ALL CORNERS & EDGES .005 R. MAX 3. CHAMFER 1st & LAST THREADS 45° 4. SURFACE FINISHED 32/ UNLESS OTHERWISE SPECIFIED. 5. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN .002 T.I.R. 6. ALL DIMENSIONS ARE AFTER PLATING.			FINISH		
				DIMENSIONS ARE IN INCHES TOLERANCES			SIZE A	FSCM NO. 0T8L4	SHEET 1
				DECIMALS .X ±.030 .XX ±.010 .XXX ±.005	FRACTIONAL ± 1/64	ANGULAR .X° ±1°0' .X°X' ±15'		DWG. NO. NJ-SMAJ-BH	