



NOTES:

MATERIALS: SST. CORROSION-RESISTANT, NON MAGNETIC 303, PER ASTM A484 AND A582. BERYLLIUM COPPER PER ASTM-B-196, QQ-C-530
 OXIDE-NORYL (TM), MIL-P-46129
 PTFE FLUOROCARBON PER ASTM-D-1710 TYPE 1

FINISH: CENTER CONDUCTORS AND SOLDER COMPONENTS SHALL BE PLATED PER MIL-G-45204 TYPE II, CLASS 1 OVER NICKEL PLATE PER QQ-N-290.
 BODY AND BODY COMPONENTS SHALL BE PASSIVATED PER ASTM A380.

FREQUENCY: DC-18 GHz
 VSWR: 1.15 TO 18 GHz
 INSERTION LOSS: $.05\sqrt{\text{FREQUENCY}}$

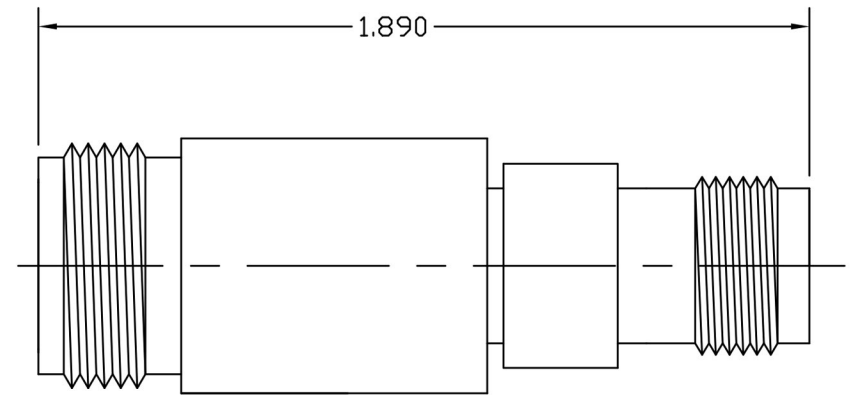

LTR	DESCRIPTION	DATE	APPR.	DRAWN	CHECKED		5214 Bonsai Street, Moorpark, CA 93021 (888) 498-3242 • www.hasco-inc.com			
-	REL	04/03		APPR.	SCALE		MATERIAL	TITLE		
				UNLESS OTHERWISE SPECIFIED: 1. REMOVE ALL BURRS 2. BREAK ALL CORNERS & EDGES .005 R. MAX 3. CHAMFER 1st & LAST THREADS 45° 4. SURFACE FINISHED 32/ UNLESS OTHERWISE SPECIFIED. 5. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN .002 T.I.R. 6. ALL DIMENSIONS ARE AFTER PLATING.			N JACK TO TNC JACK			
				DIMENSIONS ARE IN INCHES TOLERANCES			FINISH			
				DECIMALS .X ±.030 .XX ±.010 .XXX +.005	FRACTIONAL ± 1/64	ANGULAR .X° ±1°0' .X°X' ±15'	SIZE	FSCM NO.	SHEET	DWG. NO.
							A	0T8L4	1	NJ-TNCJ