

Part No:

HM3508



Advanced Microwave Double Balanced Microwave Mixer SMA Female, 25 GHz to 40 GHz

Mixer Specifications

- Frequency Range RF/LO 25 - 40 GHz
- Frequency Range IF DC - 8 GHz
- Conversion Loss 10 dB Typ., 13 dB max.
- L/R Isolation 32 dB Typ., 27 dB min.
- L/I Isolation 30 dB Typ., 24 dB min.
- LO Drive Level +14 to +17 dBm
- Input P1 dB +8 dBm min.
- Noise Figure Conv. Loss +0.5 dB
- Max Input Power +20 dBm
- Operating Temperature -40° to +85°C
- Storage Temperature -54° to +125°C
- ESD Sensitive Handle only in ESD Workstation

*NOTE:
Data shown here is actual plotted data.
It is not computer generated.*




The Advanced Microwave HM3508 is a double-balanced 25 to 40 GHz microwave mixer with an IF frequency range of DC to 8 GHz. The LO is driven between +14 to +17 dBm, and as an up or downconverter features typical conversion loss of 10 dB, L to I isolation of 30 dB, and L to R isolation of 32 dB. Maximum Input power is +20dBm.

The HM3508 is RoHS compliant.




The Advanced Microwave Mixer offers an ultra wideband matching structure with a quad matched monolithic Schottky barrier diode, resulting in a broad band mixer with low conversion loss and low spurious response. The planar construction allows optimum phase and amplitude matching and tracking over a wide frequency range.

Advanced Microwave mixers can also be used for biphas and pulse modulation where the carrier signal is fed into LO and the modulated signal will appear at the RF port when a bipolar signal is fed into the IF port. The phase of the output signal will shift to 180 degrees when a reversal of polarity occurs. The current into the IF port is limited to 25 milliamps.

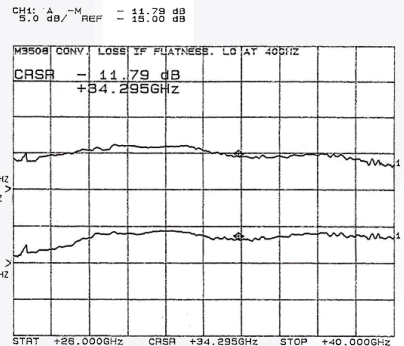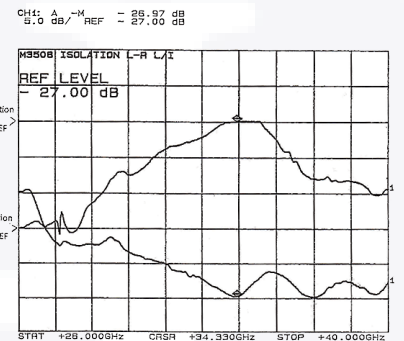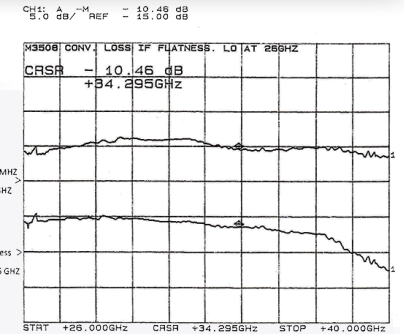

To view online, go to: <https://www.hasco-inc.com/mixers/double-balanced-microwave-mixer-sma-female-25-ghz-to-40-ghz-with-if-range-of-dc-to-8-ghz-lo-power-14dbm-to-17dbm/>

HM3508 | 25 - 40 GHz | Outline Drawing

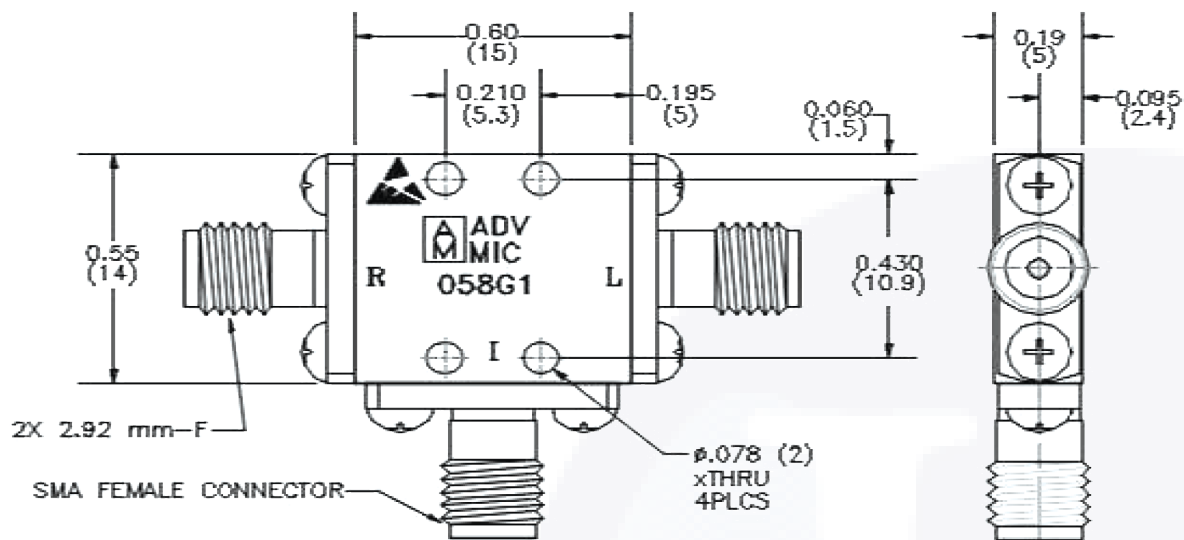

To view online, go to: <https://www.hasco-inc.com/mixers/double-balanced-microwave-mixer-sma-female-25-ghz-to-40-ghz-with-if-range-of-dc-to-8-ghz-lo-power-14dbm-to-17dbm/>

LTR	DESCRIPTION	DATE	APPR.	DRAWN BY: ABC	CHECKED BY: ABC
-	RELEASE	12/16	TAC	APPROVED BY: ABC	
<p>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HASCO COMPONENTS AND SHALL NOT BE REPRODUCED, COPIED NOR USED - IN WHOLE OR IN PART - AS THE BASIS FOR THE MANUFACTURE OR SALE OF OTHER ITEMS WITHOUT THE EXPRESS, WRITTEN PERMISSION OF HASCO COMPONENTS.</p>					
<p>THIS DRAWING IS A CONTROLLED DOCUMENT</p>					
<p>MATERIALS: SEE DATA SHEET</p>		<p>CAGE CODE: 0T8L4</p>		<p>SCALE: N/A</p>	
<p>FINISHES: SEE DATA SHEET</p>		<p>PART NO./DRAWING NO. HM3508</p>		<p>SIZE: A</p>	
<p>5214 Bonsai Street • Moorpark, CA 93021 (888) 498-3242 • sales@hasco-inc.com www.hasco-inc.com</p>					
<p>REV: -</p>					