


Part No:

HBT40-0140-MF

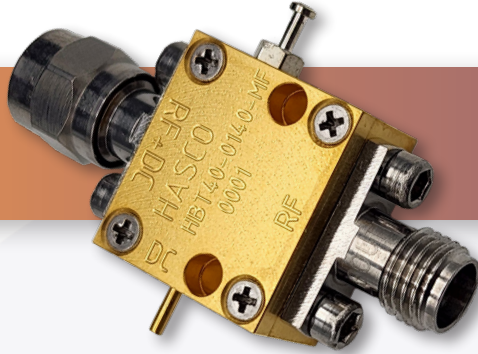

Bias Tee with 2.92mm Female to 2.92mm Male Connectors - 40 GHz

The HASCO **HBT40-0140-MF** is a 40 GHz Bias Tee with 2.92mm Female to 2.92mm Male connectors.

A bias tee is a three-port network used for setting the DC bias point of some electronic components without disturbing other components. The bias tee is a diplexer. The low-frequency port is used to set the bias; the high-frequency port passes the radio-frequency signals but blocks the biasing levels; the combined port connects to the device, which sees both the bias and RF. Properties that are important to a bias tee are RF bandwidth, insertion loss and mismatch at the two RF ports, the maximum DC current, and video bandwidth of the DC port.

Electrical


• RF Frequency Range	0.1 - 40 GHz
• DC Frequency Range	DC - 400 KHz
• Insertion Loss	1.5 dB
• Return Loss	-20 dB (0.1 - 18 GHz) -15 dB (18 - 40 GHz)
• VSWR	1.55:1 Max
• Voltage	35 V @ 250 mA

Environmental


• Temperature Range	-55°C to 125°C
---------------------	----------------


Material

• Body	Gold plated Brass
• Dielectric	PTFE
• Center Contact	Gold plated BeCu

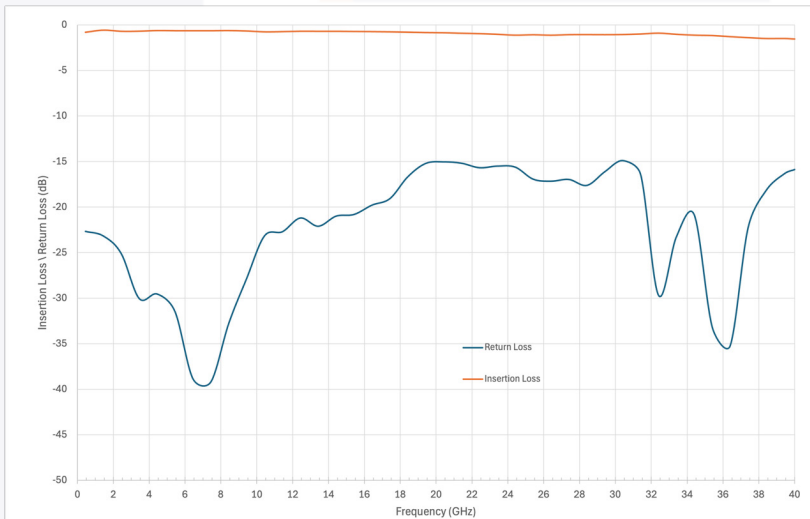

Bias Tee with 2.92mm Female to 2.92mm Male Connectors | 0.1 - 40 GHz | Outline Drawing

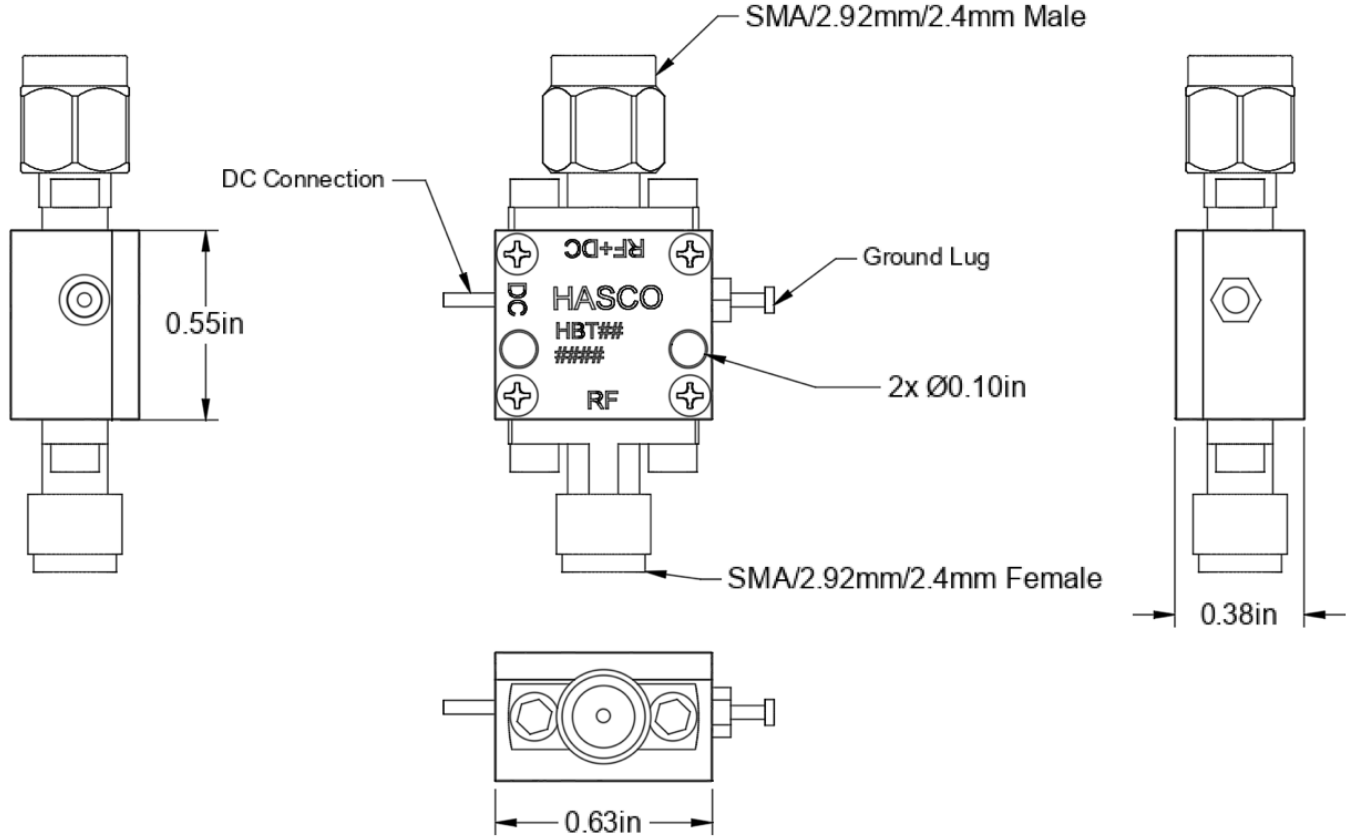

LTR	DESCRIPTION	DATE	APPR.	DRAWN BY: NS	REVIEWED BY: JS	<div><div>5214 Bonsai Avenue • Moorpark, CA 93021 (888) 498-3242 • sales@hasco-inc.com www.hasco-inc.com</div></div>			
-	RELEASE	6/25	TC		APPROVED BY: TC				
				THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HASCO COMPONENTS AND SHALL NOT BE REPRODUCED, COPIED NOR USED - IN WHOLE OR IN PART - AS THE BASIS FOR THE MANUFACTURE OR SALE OF OTHER ITEMS WITHOUT THE EXPRESS, WRITTEN PERMISSION OF HASCO COMPONENTS.		MATERIALS:	CAGE CODE:	SCALE:	SIZE:
						SEE DATA SHEET	OT8L4	N/A	A
						FINISHES:	PART NO./DRAWING NO.		REV:
						SEE DATA SHEET	HBT40-0140-MF		-
THIS DRAWING IS A CONTROLLED DOCUMENT									