



Between-Series Adapters

TNC to SMA Adapters • DC to 18.0 GHz

Application:

- DC to 18.0 GHz


Features:

- Low VSWR:
DC to 18.0 GHz.....1.15:1 max.
- Durability: 500 Cycles Min.
- Temperature Rating -55°C to +100°C

Materials:


- Housing: Stainless Steel, Passivated
- Contact: Beryllium Copper
- Dielectric: Oxide-Noryl™ and PTFE Fluorocarbon

TNC (f) to SMA (f)

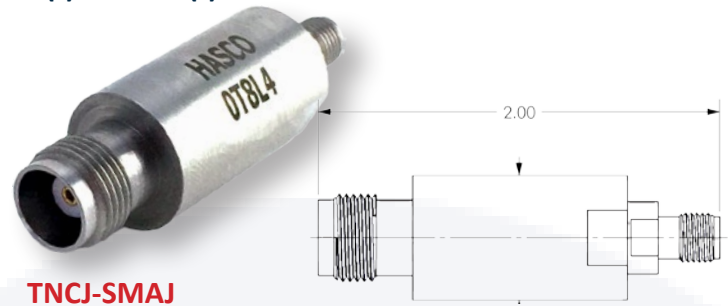


TNCJ-SMAJ

TNC (f) to SMA (m)

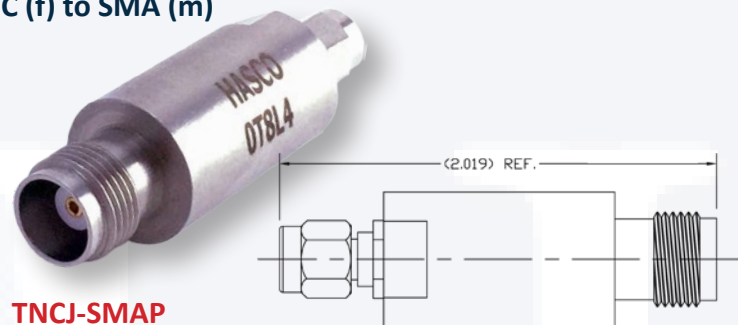


TNCJ-SMAP

TNC (m) to SMA (f)

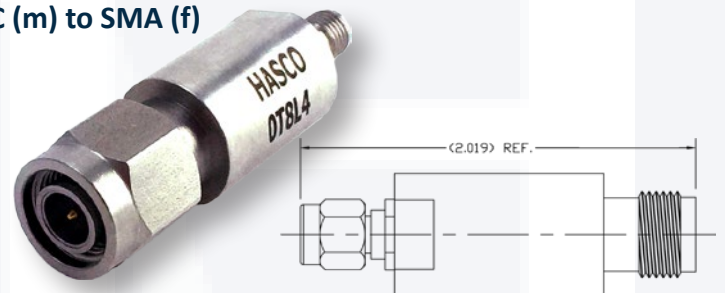

TNCJ-SMAJ

TNC (m) to SMA (m)

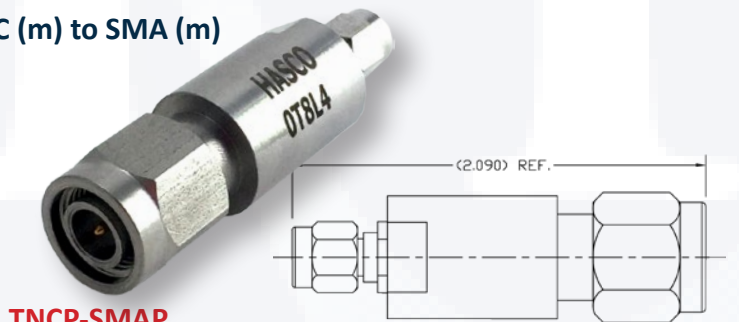

TNCJ-SMAP