

MATERIALS:

- SST. CORROSION-RESISTANT, NON MAGNETIC 303, PER ASTM A484 AND A582
- BERYLLIUM COPPER PER ASTM-B-196, QQ-C-530
- PTFE FLUOROCARBON PER ASTM-D-1710 TYPE 1



FINISH:


- CENTER CONDUCTORS, AND SOLDER COMPONENTS SHALL BE PLATED PER MIL-G-45204 TYPE II, CLASS 1 OVER NICKEL PLATE PER QQ-N-290.
- BODY AND COMPONENTS SHALL BE PASSIVATED PER ASTM A380

FREQUENCY: DC-18GHz

VSWR: 1.15 TO 18GHz

INSERTION LOSS: .05 SQT(F(GHZ)) DB

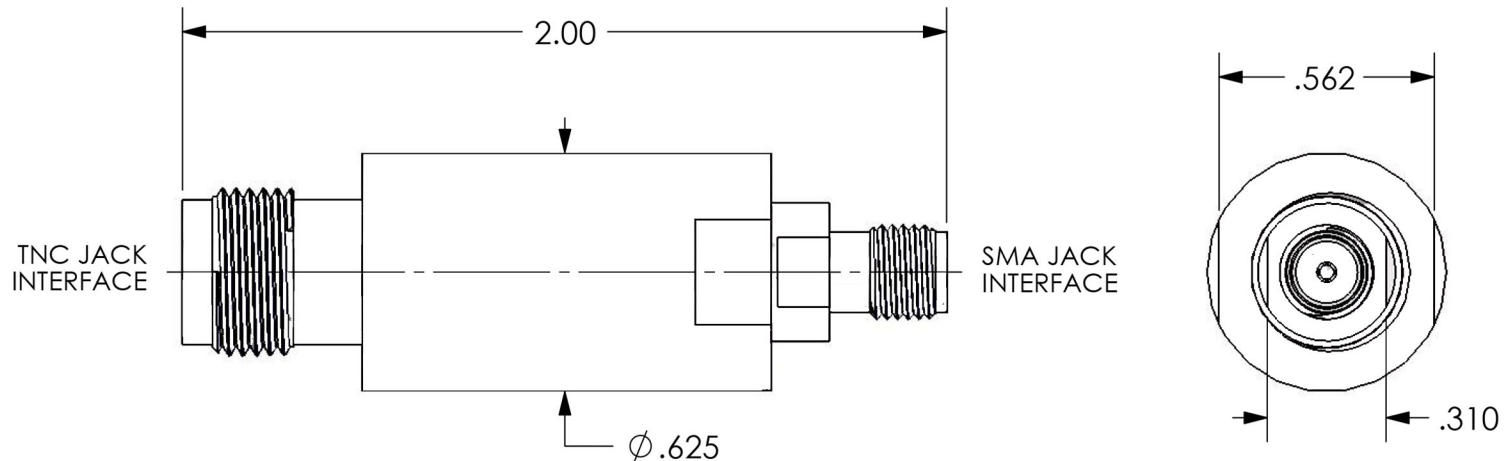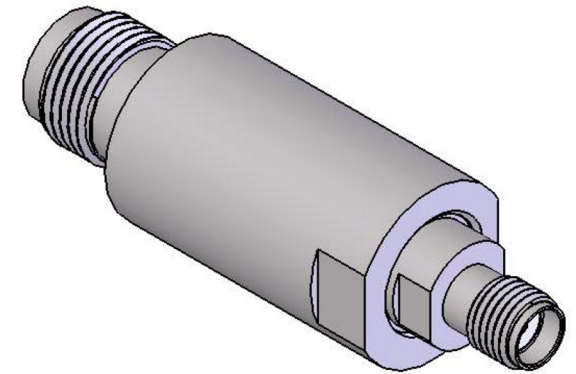

LTR	DESCRIPTION	DATE	APPR.	DRAWN LMW	CHECKED		5214 Bonsai Street, Moorpark, CA 93021 (888) 498-3242 • www.hasco-inc.com		
-	REL	02/04		APPR.	SCALE		MATERIAL	TITLE: TNC JACK TO SMA JACK	
				UNLESS OTHERWISE SPECIFIED: 1. REMOVE ALL BURRS 2. BREAK ALL CORNERS & EDGES .005 R. MAX 3. CHAMFER 1st & LAST THREADS 45° 4. SURFACE FINISHED 32 UNLESS OTHERWISE SPECIFIED. 5. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN .002 T.I.R. 6. ALL DIMENSIONS ARE AFTER PLATING.			FINISH		
				DIMENSIONS ARE IN INCHES TOLERANCES			SIZE A	FSCM NO. 0T8L4	SHEET 1
				DECIMALS .X ± .030 .XX ± .010 .XXX ± .005	FRACTIONAL ± 1/64	ANGULAR .X° ± 1° .X°X ± 15'		DWG. NO. TNCJ-SMAJ	