


Part No:

HLB098-VP-VP-L*

*L=Length (See Chart Below)

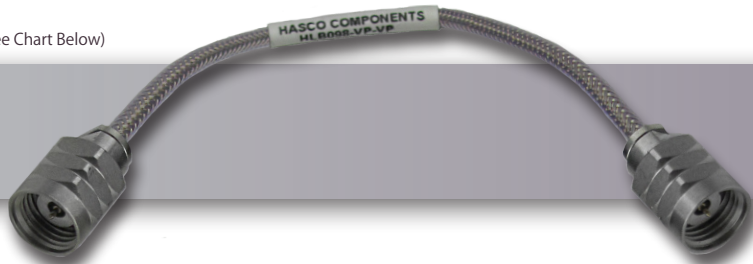

HLB098 Flexible Cable Assembly with 1.85mm Male Connectors • DC ~ 67 GHz

The HLB098 Littlebend Ultra Flexible RF Cable is designed for demanding microwave interconnect requirements. They are phase and amplitude stable. This cable is well suited for dense microwave packaging with a 0.20" minimum bend radius in an 0.098" cable with stainless steel braid.

HLB098-VP-VP-L* Littlebend Ultra Flexible RF cables are terminated with high-performance 1.85mm connectors. (Also available in 2.92mm, 2.4mm, 1.0mm, SMA, SMP and SMPM connectors.) Additional configurations available by special order.

The **HLB098-VP-VP-L*** Littlebend Ultra-Flexible RF cable series is RoHS Compliant.



Part #	*L	2GHz		18 GHz		24 GHz		40 GHz		50 GHz		67 GHz	
		VSWR	IL(dB)	VSWR	IL(dB)	VSWR	IL(dB)	VSWR	IL(dB)	VSWR	IL(dB)	VSWR	IL(dB)
HLB098-VP-VP-03	3"	1.15	0.3	1.3	0.6	1.35	0.70	1.35	0.90	1.4	1.00	1.4	1.30
HLB098-VP-VP-04	4"	1.15	0.3	1.3	0.7	1.35	0.80	1.35	1.00	1.4	1.10	1.4	1.40
HLB098-VP-VP-05	5"	1.15	0.3	1.3	0.8	1.35	0.90	1.35	1.10	1.4	1.30	1.4	1.60
HLB098-VP-VP-06	6"	1.15	0.3	1.3	0.8	1.35	0.90	1.35	1.20	1.4	1.40	1.4	1.70
HLB098-VP-VP-07	7"	1.15	0.4	1.3	0.9	1.35	1.00	1.35	1.30	1.4	1.50	1.4	1.90
HLB098-VP-VP-08	8"	1.15	0.4	1.3	1	1.35	1.10	1.35	1.40	1.4	1.70	1.4	2.00
HLB098-VP-VP-09	9"	1.15	0.4	1.3	1	1.35	1.20	1.35	1.50	1.4	1.80	1.4	2.10
HLB098-VP-VP-10	10"	1.15	0.4	1.3	1.1	1.35	1.30	1.35	1.70	1.4	1.90	1.4	2.30
HLB098-VP-VP-11	11"	1.15	0.4	1.3	1.2	1.35	1.40	1.35	1.80	1.4	2.00	1.4	2.40
HLB098-VP-VP-12	12"	1.15	0.5	1.3	1.2	1.35	1.40	1.35	1.90	1.4	2.20	1.4	2.60
HLB098-VP-VP-13	13"	1.15	0.5	1.3	1.3	1.35	1.50	1.35	2.00	1.4	2.30	1.4	2.70
HLB098-VP-VP-14	14"	1.15	0.5	1.3	1.4	1.35	1.60	1.35	2.10	1.4	2.40	1.4	2.90
HLB098-VP-VP-15	15"	1.15	0.5	1.3	1.5	1.35	1.70	1.35	2.20	1.4	2.50	1.4	3.00
HLB098-VP-VP-16	16"	1.15	0.6	1.3	1.5	1.35	1.80	1.35	2.30	1.4	2.70	1.4	3.20
HLB098-VP-VP-17	17"	1.15	0.6	1.3	1.6	1.35	1.90	1.35	2.40	1.4	2.80	1.4	3.30
HLB098-VP-VP-18	18"	1.15	0.6	1.3	1.7	1.35	1.90	1.35	2.50	1.4	2.90	1.4	3.50
HLB098-VP-VP-19	19"	1.15	0.6	1.3	1.7	1.35	2.00	1.35	2.60	1.4	3.00	1.4	3.60
HLB098-VP-VP-20	20"	1.15	0.6	1.3	1.8	1.35	2.10	1.35	2.80	1.4	3.20	1.4	3.70
HLB098-VP-VP-21	21"	1.15	0.7	1.3	1.9	1.35	2.20	1.35	2.90	1.4	3.30	1.4	3.90
HLB098-VP-VP-22	22"	1.15	0.7	1.3	2	1.35	2.30	1.35	3.00	1.4	3.40	1.4	4.00
HLB098-VP-VP-23	23"	1.15	0.7	1.3	2	1.35	2.40	1.35	3.10	1.4	3.50	1.4	4.20
HLB098-VP-VP-24	24"	1.15	0.7	1.3	2.1	1.35	2.40	1.35	3.20	1.4	3.70	1.4	4.30
HLB098-VP-VP-30	30"	1.15	0.9	1.3	2.5	1.35	2.90	1.35	3.90	1.4	4.40	1.4	5.20
HLB098-VP-VP-36	36"	1.15	1.0	1.3	3	1.35	3.40	1.35	4.50	1.4	5.20	1.4	6.10
HLB098-VP-VP-1M	1 Meter	1.15	1.1	1.3	3.2	1.35	3.70	1.35	4.90	1.4	5.60	1.4	6.50
HLB098-VP-VP-48	48"	1.15	1.3	1.3	3.8	1.35	4.40	1.35	5.90	1.4	6.70	1.4	7.80

Product specifications subject to change without notification.

5214 Bonsai Street • Moorpark, CA 93021 | (888) 498-3242 • sales@hasco-inc.com | www.hasco-inc.com

© 2023 HASCO COMPONENTS

Electrical

- Impedance 50 Ohms
- Frequency Range DC - 67 GHz
- VSWR See Chart
- Insertion Loss See Chart
- Diel. Withstanding Voltage 750V
- Insulation Resistance 1000MΩ

Mechanical

- Min Bend Radius Static: 5mm, Repeated: 10mm
- Durability 1000 cycles Min.


Environmental Data

- Temperature Range -55°C to +125°C

Material

- Cable Center Conductor Silver Plated Solid Copper
- Cable Outer Conductor Silver Plated Copper Strip
- Cable Interlayer Aluminum Foil
- Cable Outer Shield Stainless Steel Braid
- Cable Jacket FEP
- Dielectric Low Density PEI
- 1.85mm Body & Nut Passivated Stainless Steel
- 1.85mm Center Contact Gold Plated Brass

Littlebend Cable Series with 1.85mm Male Connectors | DC - 67 GHz | Outline Drawing

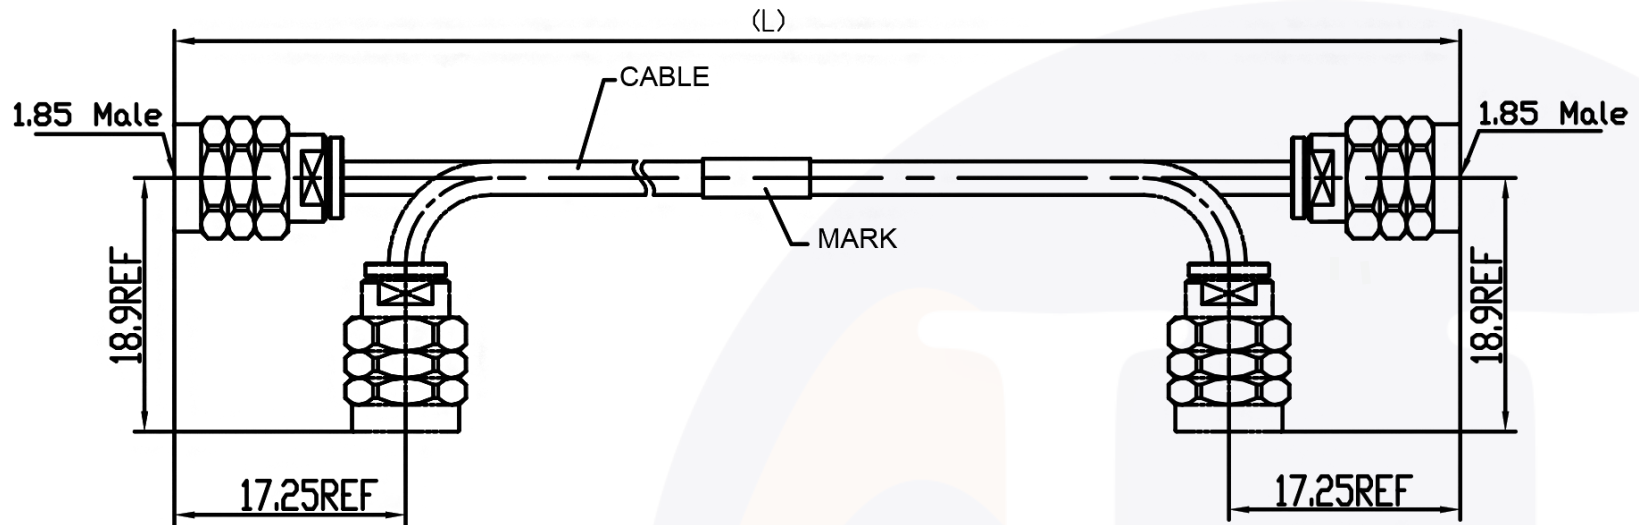

LTR	DESCRIPTION	DATE	APPR.	DRAWN BY: NS	CHECKED BY: JS
-	RELEASE	02/23	TC	REVIEWED BY: GC	APPROVED BY: TC
				THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HASCO COMPONENTS AND SHALL NOT BE REPRODUCED, COPIED NOR USED - IN WHOLE OR IN PART - AS THE BASIS FOR THE MANUFACTURE OR SALE OF OTHER ITEMS WITHOUT THE EXPRESS, WRITTEN PERMISSION OF HASCO COMPONENTS.	
THIS DRAWING IS A CONTROLLED DOCUMENT					



by HASCO, Inc.
 5214 Bonsai Street • Moorpark, CA 93021
 (888) 498-3242 • sales@hasco-inc.com
www.hasco-inc.com/littlebend

MATERIALS: SEE DATA SHEET	CAGE CODE: 0T8L4	SCALE: N/A	SIZE: A
FINISHES: SEE DATA SHEET	PART NO./DRAWING NO. HLB098-VP-VP-L*		REV: -

*L=Length (See Chart on Page 1)