


Part No:

HLL110R-WP-WJ-L



HLL110R Low Loss Ruggedized Cable Series with 1.0mm Male to 1.0mm Female Connectors - 110 GHz

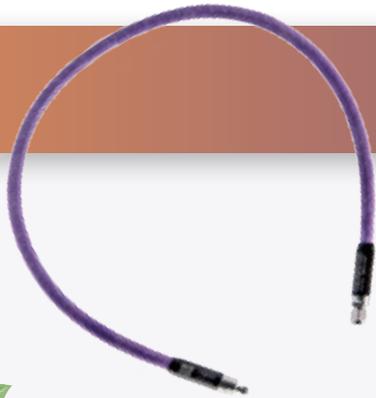


Features

- RoHs Compliant 
- Low Loss, Low VSWR, High Reliability

The HASCO HLL110R Series Cable is a low loss LL110 cable that operates from DC to 110 GHz. This cable series is constructed with 1.0mm Male to 1.0mm Female connectors. These cables are internally ruggedized with multi-layer copper spiral and braided armor. They offer excellent phase and amplitude stability vs. flexure.

Part #	*L	DC - 40 GHz		40 - 50 GHz		50 - 67 GHz		67 - 110 GHz	
		VSWR	IL(dB)	VSWR	IL(dB)	VSWR	IL(dB)	VSWR	IL(dB)
HLL110R-WP-WJ-13	13"	1.22:1	2.9	1.22:1	3.3	1.26:1	4.0	1.26:1	5.3

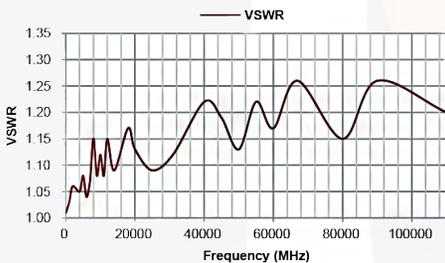

Electrical

- Impedance 50 Ω
- Frequency Range DC - 110 GHz
- Amplitude Stability $\pm 0.2 \text{ dB}$ @ 110 GHz
- Phase Stability vs. Flexure $\pm 8^\circ$ @ 110 GHz (When wrapped 360° around a 50mm radius mandrel)
- Shielding Effectiveness >100 dB
- Power Handling @ 40°C

1GHz	12GHz	18GHz	26.5GHz	40GHz	50GHz	67GHz	110GHz
49.3W	13.6W	11W	8.9W	7.1W	6.2W	5.3W	3.4W

Mechanical


- Min Bend Radius 30mm

Environmental

- Temperature Range -55°C to 85°C

Material

- Connector Body & Nut Passivated Stainless Steel
- Connector Dielectric PEI
- Center Contact Gold Plated BeCu
- Connector Sleeve Blackened Aluminum
- Cable Inner Conductor Solid SPC
- Cable Dielectric Foamed PTFE
- Cable Inner Braid SPC Strip
- Cable Outer Braid SPC Braid
- Cable Jacket FEP
- Cable Crush Member Stainless Steel Spiral Spring
- Cable Strength Member Stainless Steel Braid
- Cable Outer Binder PTFE Fim Tape w/ Silicone Adhesive
- Cable Outer Jacket PTFE Braid, Cantone 526C

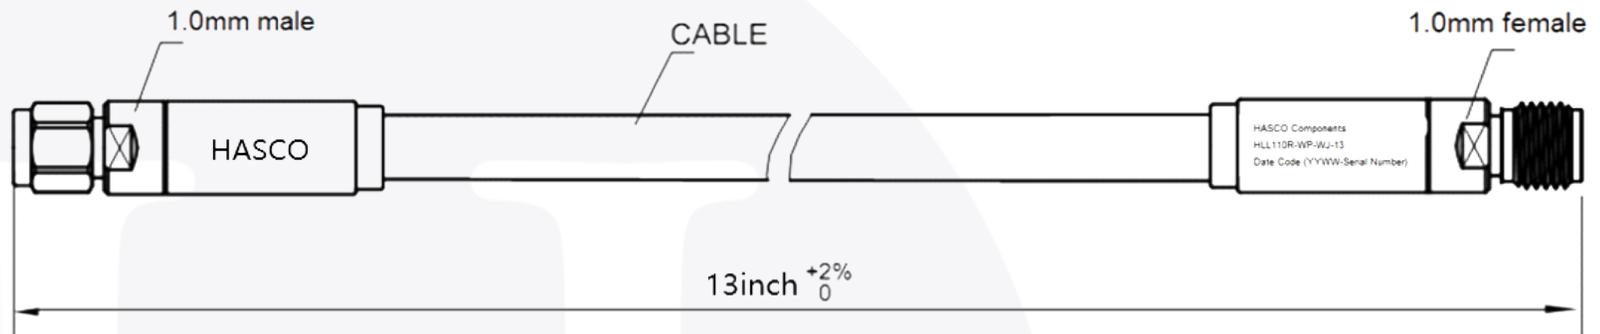

LTR	DESCRIPTION	DATE	APPR.	DRAWN BY: NS	REVIEWED BY: JS	 <p>5214 Bonsai Avenue • Moorpark, CA 93021 (888) 498-3242 • sales@hasco-inc.com www.hasco-inc.com</p>
-	RELEASE	9/25	TC		APPROVED BY: TC	
				THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HASCO COMPONENTS AND SHALL NOT BE REPRODUCED, COPIED NOR USED - IN WHOLE OR IN PART - AS THE BASIS FOR THE MANUFACTURE OR SALE OF OTHER ITEMS WITHOUT THE EXPRESS, WRITTEN PERMISSION OF HASCO COMPONENTS.		
					MATERIALS: SEE DATA SHEET	CAGE CODE: 0T8L4
					FINISHES: SEE DATA SHEET	SCALE: N/A
THIS DRAWING IS A CONTROLLED DOCUMENT						SIZE: A
						PART NO./DRAWING NO. HLL110R-WP-WJ-L
						REV: -