HLL228R-24P-24P-30





2.4mm Male to 2.4mm MaleTest Cable using LL228 Low Loss Ruggedized Flexible Cable, Excellent Phase and Amplitude Stability vs. Flexure, DC- 50 GHz, 30 Inches

The HASCO **HLL228R Series Cable** is a low loss LL228 cable that operates from DC to 50 GHz. This cable series is constructed with 2.4mm Male to 2.4mm Male connectors. These cables are internally ruggedized with multi-layer copper spiral and braided armor. They offer excellent phase and amplitude stability vs. flexure. The

The HLL228R-24P-24P-30 is RoHS Compliant.

HLL228R Series cables offer 1.35:1 max VSWR.



HASCO offers many types and configurations of RF and microwave cable assemblies and can support most requirements, such as flexible, conformable, semi-rigid, VGA, low-loss, phase stable, armored, jacketed and more; all assembled with the highest quality RF connectors.


Specifications

| Frequency Range | DC - 50 GHz | |
|---------------------------------|-------------------------|--|
| • Insulation Resistance | 5,000ΜΩ | |
| • Insertion Loss | ≤2.8dB @ 50 GHz | |
| • VSWR | 1.35:1 MAX | |
| • Impedence | 50 Ohms | |
| Dielectric Withstanding Voltage | 1,000V Max at Sea Level | |
| • Min. Bend Radius | 1.4" | |
| Velocity of Propagation | 76% | |
| • RF Leakage | >90 dB | |
| Phase Stability | ≤±0.1dB @ 50 GHz | |
| Phase Stability over Flexure | ≤±10° @ 50 GHz | |
| Dielectric Withstanding Voltage | 1,000V Max at Sea Level | |
| Capacitance | 27pf/ft=88pf/m | |
| Temperature Range | -55°C - +125°C | |

Materials and Finishes

| <u>DESCRIPTION</u> | MATERIALS | FINISH OR COLOR |
|--|-----------------|-----------------|
| Connectors | Stainless Steel | Passivated |
| Insulation | PTFE | N/A |
| Inner and Outer Shield | Copper | Silver Plated |
| • Inner Armor | Copper | Silver Plated |
| • Jacket | FEP | N/A |
| Outer Armor | PTFE Braid | Purple |

HLL228R-24P-30 | DC - 50 GHz | Outline Drawing

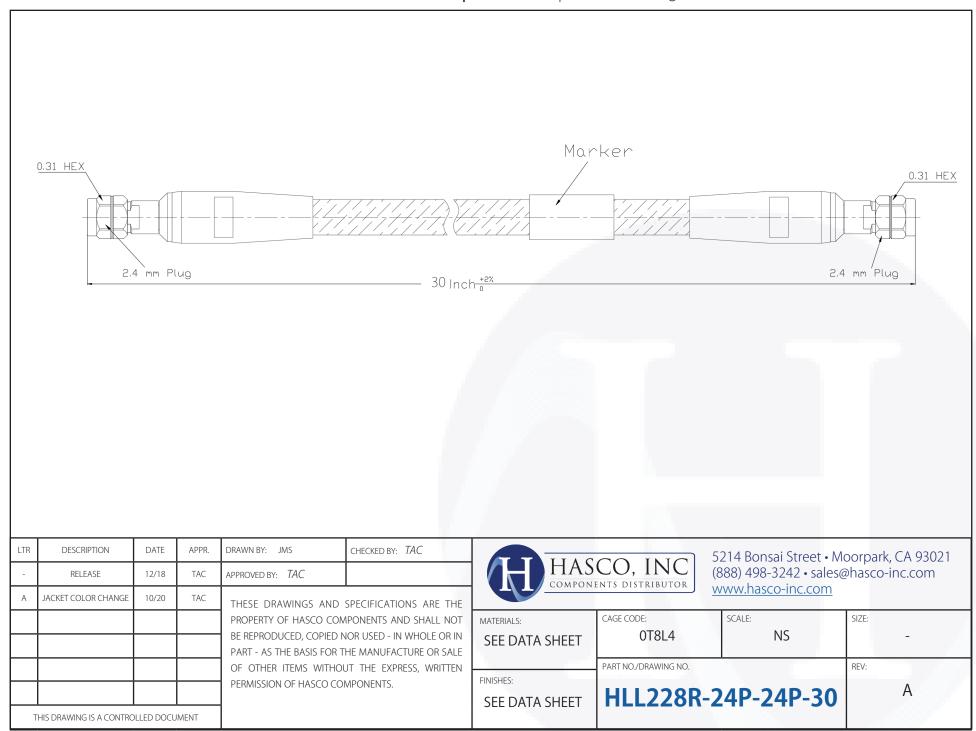

Product specifications subject to change without notification.