HLL228R-29P-29P-24





The HASCO **HLL228R Series Cable** is a low loss LL228 cable that operates from DC to 40 GHz. This cable series is constructed with 2.92mm Male to 2.92mm Male connectors. These cables are internally ruggedized with multi-layer copper spiral and braided armor. They offer excellent phase and amplitude stability vs. flexure. This HLL228R Series cables offers 1.30:1 max VSWR.

The HLL228R-29P-29P-24 is RoHS Compliant.



HASCO offers many types and configurations of RF and microwave cable assemblies and can support most requirements, such as flexible, conformable, semi-rigid, VGA, low-loss, phase stable, armored, jacketed and more; all assembled with the highest quality RF connectors.

2.92mm Male to 2.92mm MaleTest Cable using LL228 Low Loss Ruggedized Flexible Cable, Excellent Phase and Amplitude Stability vs. Flexure, DC- 40 GHz, 24 Inches

Specifications

Frequency Range	DC - 40 GHz				
Insulation Resistance	5,000ΜΩ				
• Insertion Loss	≤2.0dB @ 40 GHz				
• VSWR	1.30:1 MAX				
• Impedence	50 Ohms				
Dielectric Withstanding Voltage	1,000V Max at Sea Level				
• Min. Bend Radius	1.4"				
 Velocity of Propagation 	83%				
• RF Leakage	>90 dB				
Phase Stability	≤±0.04dB @ 40 GHz				
Phase Stability over Flexure	≤±4° @ 40 GHz				
Capacitance	27pf/ft=88pf/m				
Temperature Range	-45°C - +85°C				

Materials and Finishes

• Connectors Passivated Stainless Steel

• Connector Center Contact Gold Plated Copper


• Insulation PEI

Inner and Outer Shield Sliver Plated CopperCable Center Contact Silver Plated Copper

• Jacket FEP

• Outer Armor Purple PTFE Braid

HLL228R-29P-29P-24 | DC - 50 GHz | Outline Drawing

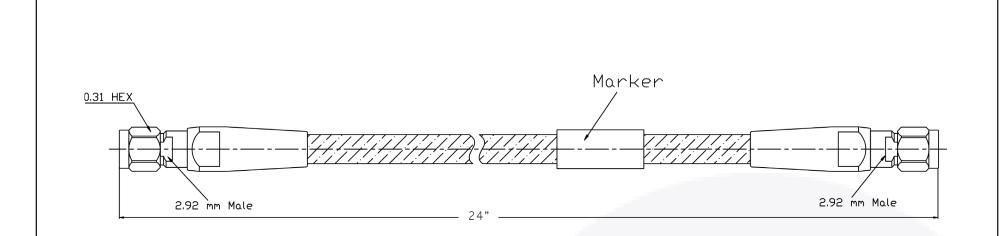

LTR	DESCRIPTION	DATE	APPR.	CREATED BY: JMS	CHECKED BY: TAC		50 INC) 5	214 Bonsai Street • Mo	oorpark, CA 93021
-	RELEASE	12/19	TAC	APPROVED BY: TAC		HAS	hasco-inc.com		
А	JACKET COLOR CHANGE	10/20	TAC	THESE DRAWINGS AND	SPECIFICATIONS ARE THE	COMPONENTS DISTRIBUTOR WWW.hasco-inc.com			
				PROPERTY OF HASCO COM	MPONENTS AND SHALL NOT	MATERIALS:	CAGE CODE:	SCALE:	SIZE:
				BE REPRODUCED, COPIED N	NOR USED - IN WHOLE OR IN	SEE DATA SHEET	0T8L4	NS	-
				PART - AS THE BASIS FOR T	THE MANUFACTURE OR SALE	JEE DATA SHEET			
				OF OTHER ITEMS WITHOU	UT THE EXPRESS, WRITTEN		PART NO./DRAWING NO.		REV:
-				PERMISSION OF HASCO COI	MPONENTS.	FINISHES:		Λ	
						SEE DATA SHEET HLL228R-29P-29P-24			Α
	THIS DRAWING IS A CONTROLLED DOCUMENT								