


Part No:

HULL190-S1-S1-L




HULL190 Ultra Low Loss Flexible Cable Series with SMA Male Connectors - 26.5 GHz

Features


- RoHs Compliant 
- Low Loss, Low VSWR, High Reliability
- Phase Stable over Temp: 550ppm Max @ -45°C ~ 85°C
- Phase Stable vs. Flexure: $\pm 4.5^\circ$ @ 26.5 GHz
(When wrapped 360° around a 1.89" diameter mandrel)

The HASCO **HULL190** is an Ultra Low Loss Flexible Cable Series that is phase stable over temperature and phase stable vs. flexure. Available with SMA Male connectors and rated to 26.5 GHz.

Cable Attenuation
@ +25°C and Sea Level

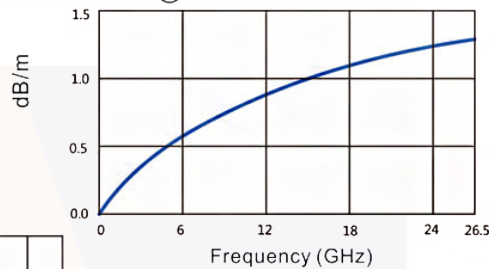

Max RF Power
@ +25°C and Sea Level

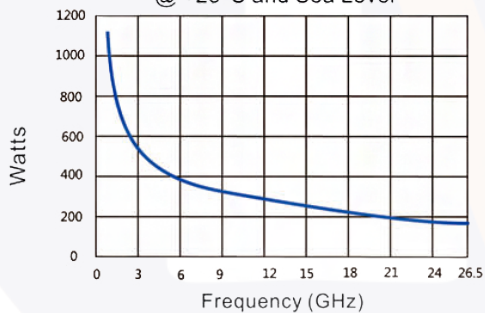

Electrical

• Impedance	50 Ω		
• Frequency Range	DC - 26.5 GHz		
• VSWR	1.35:1 Max		
• Insertion Loss	-0.39 dB/ft @ 26.50 GHz		
• Amplitude Stability	$\leq \pm 0.2$ dB thru 26.5 GHz		
• Velocity of Propogation	85%		
• Time Delay	1.18 ns/ft		
• Capacitance	23.7 pF/ft		
• Power CW	650 W @ 2 GHz	260 W @ 12 GHz	190 W @ 26.5 GHz
• Phase Stability vs. Flexure	$\pm 0.33^\circ$	$\pm 2.0^\circ$	$\pm 4.5^\circ$
• RF Leakage	< -90 dB dB @ 26.5 GHz		

Mechanical

- Min Bend Radius 1.0 inch
- Recommended Bend Radius 1.89 inch


Environmental


- Temperature Range -55°C to 85°C

Material

- Connector Body & Nut Passivated Stainless Steel
- Gasket Silicon
- Dielectric PTFE
- Center Contact Gold Plated BeCu
- Cable Jacket PFA

HULL190 Ultra Low Loss Flexible Cable Series with SMA Male Connectors | DC - 26.5 GHz | Outline Drawing

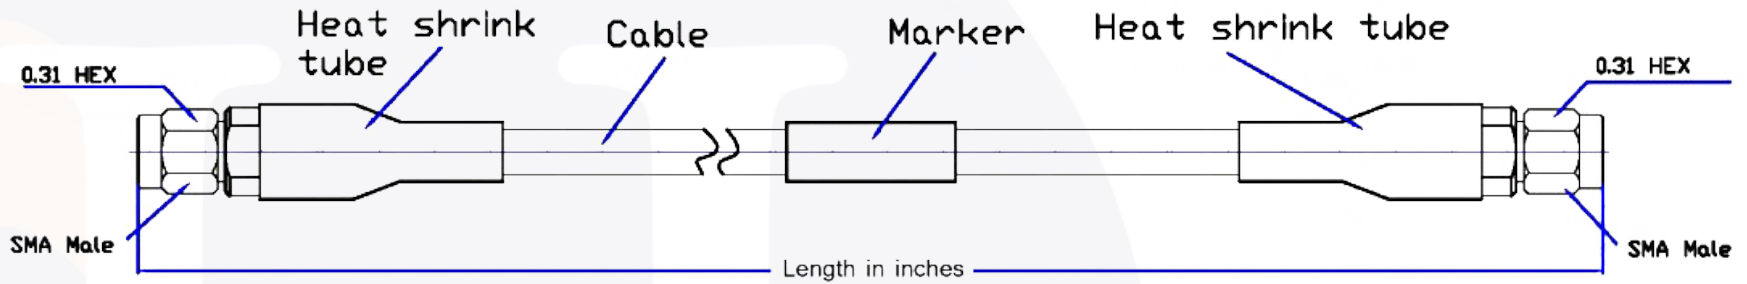

LTR	DESCRIPTION	DATE	APPR.	DRAWN BY: <i>NS</i>	REVIEWED BY: <i>JS</i>	 5214 Bonsai Avenue • Moorpark, CA 93021 (888) 498-3242 • sales@hasco-inc.com www.hasco-inc.com			
-	RELEASE	1/14	TC		APPROVED BY: <i>TC</i>				
A	DATASHEET UPDATE	6/26	TC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HASCO COMPONENTS AND SHALL NOT BE REPRODUCED, COPIED NOR USED - IN WHOLE OR IN PART - AS THE BASIS FOR THE MANUFACTURE OR SALE OF OTHER ITEMS WITHOUT THE EXPRESS, WRITTEN PERMISSION OF HASCO COMPONENTS.		MATERIALS:	CAGE CODE:	SCALE:	SIZE:
						SEE DATA SHEET	0T8L4	N/A	A
						FINISHES:	PART NO./DRAWING NO.	REV:	
						SEE DATA SHEET	HULL190-S1-S1-L	A	
THIS DRAWING IS A CONTROLLED DOCUMENT									