


THIS DRAWING UNPUBLISHED.

RELEASED FOR PUBLICATION

LOC		DIST		REVISIONS			DATE	DWN	APVD
P	LTR								
-	-	-	-	-	-	-	-	-	

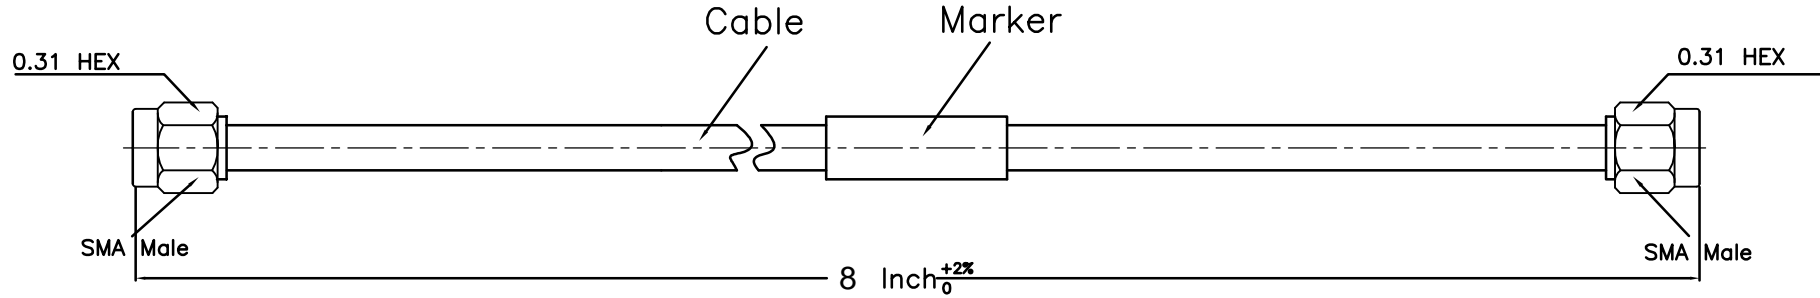

NOTES:

1.ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE:5000MΩ MIN
- 1.3 FREQUENCY RANGE: DC~26.5GHz
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
- 1.5 VSWR ≤1.35:1@26.5GHz
- 1.6 INSERTION LOSS: ≤ 1.1dB@26.5GHz

2.ENVIRONMENTAL:

TEMPERATURE RANGE: -55° to +125°

3. CONNECTOR MATERIAL AND FINISH:

- BODY: BERYLLIUM COPPER, GOLD PLATING
- NUT: STAINLESS STEEL TYPE 303 PASSIVATE
- CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
- DIELECTRIC: PTFE,NATURAL

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	HASCO HyTech Associates Sales Company, Inc		
		CHK			
DIMENSIONS INCHES		APVD	HA E HA141SR® Series		
		PRODUCT SPEC	26.5GHz Semi Rigid .141 Cable with SMA Straight Plugs		
		APPLICATION SPEC			
MATERIAL		WEIGHT	SIZE	CAGE CODE	DRAWING NO
SEE TABLE			A3	0T8L4	HA141SR-S1-S1-08
FINISH		CUSTOMER DRAWING			
SEE TABLE		SCALE	4: 1	SHEET	1 OF 1
				RVE	1

4

3

2

1

D

D

C

C

B

B

A

A