


4		3		2		1									
THIS DRAWING UNPUBLISHED.		RELEASED FOR PUBLICATION		LOC		DIST		REVISIONS		DATE		DWN		APVD	
				P		LTR									
				-		-									

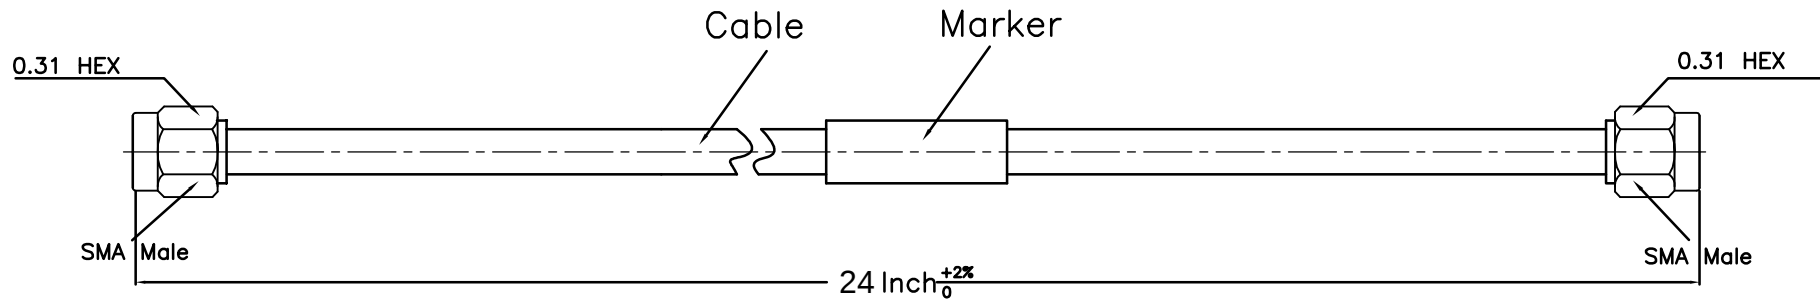

NOTES:

1.ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE:5000MΩ MIN
- 1.3 FREQUENCY RANGE: DC~26.5GHz
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
- 1.5 VSWR≤1.35:1@26.5GHz
- 1.6 INSERTION LOSS: ≤ 2.3dB@26.5GHz

2.ENVIRONMENTAL:

TEMPERATURE RANGE: -55° to +125°

3. CONNECTOR MATERIAL AND FINISH:

- BODY: BERYLLIUM COPPER, GOLD PLATING
- NUT: STAINLESS STEEL TYPE 303 PASSIVATE
- CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
- DIELECTRIC: PTFE,NATURAL

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		HASCO			
		CHK		HyTech Associates Sales Company,Inc			
DIMENSIONS INCHES		APVD		HA E			
		PRODUCT SPEC		HA141SR® Series			
		APPLICATION SPEC		26.5GHz Semi Rigid .141 Cable with SMA Straight Plugs			
MATERIAL		WEIGHT		SIZE	CAGE CODE	DRAWING NO	
SEE TABLE		SEE TABLE		A3	0T8L4	HA141SR-S1-S1-24	
CUSTOMER DRAWING				SCALE	4: 1	SHEET	1 OF 1 RVE 1