


THIS DRAWING UNPUBLISHED.

RELEASED FOR PUBLICATION

LOC		DIST		REVISIONS			
P	LTR	DATE	DWN	APVD			
-	-	-	-	-			

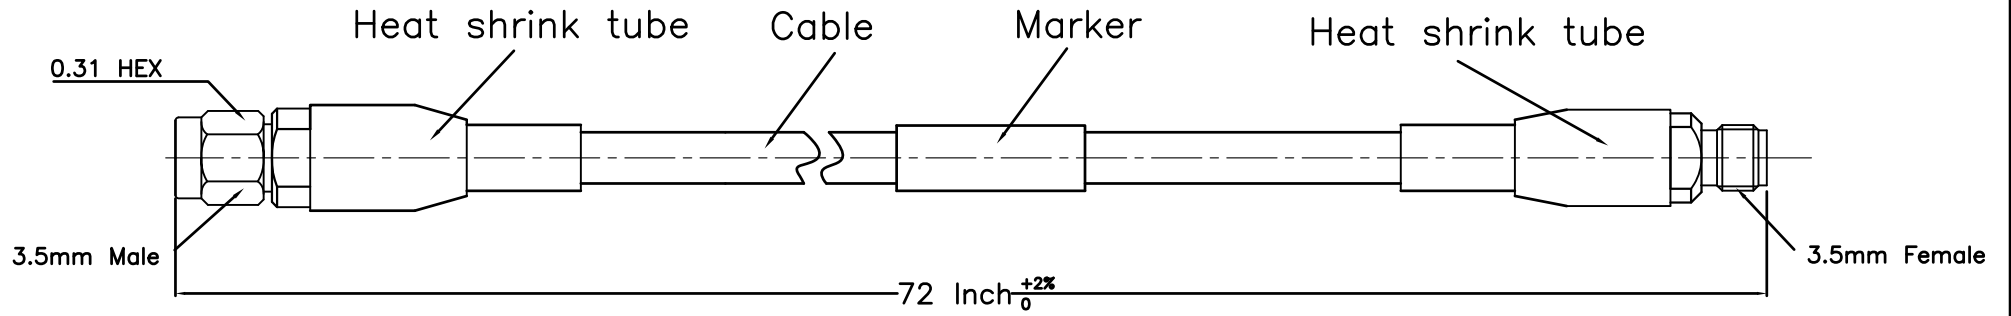

NOTES:

1.ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE: 5000MΩ MIN
- 1.3 FREQUENCY RANGE: DC~26.5GHz
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
- 1.5 VSWR ≤ 1.35:1 @ DC-26.5GHz
- 1.6 INSERTION LOSS: ≤ 3.7dB @ 30GHz

2.ENVIRONMENTAL:

TEMPERATURE RANGE: -55° to +125°

3. CONNECTOR MATERIAL AND FINISH:

- BODY: STAINLESS STEEL TYPE 303, PASSIVATE
- NUT: STAINLESS STEEL TYPE 303, PASSIVATE
- CENTER CONTACT: BERYLLIUM COPPER
- GOLD PLATING
- DIELECTRIC: PEEK, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	CZB	11/11/2015	HASCO		
		CHK			HyTech Associates Sales Company, Inc		
		APVD			NAME HLL142 Series		
		PRODUCT SPEC			26.5GHz Ultra Low Loss Flexible Cable Assemblies		
		APPLICATION SPEC			Excellent Phase Stability		
					vs. Flexure & Temperature		
		SIZE	A3	CAGE CODE	OT8L4	DRAWING NO	HLL142-35P-35J-72
		WEIGHT					
		CUSTOMER DRAWING			SCALE	4:1	SHEET 1 OF 1 RVE 1

DIMENSIONS INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED
	0 PLC ±0.25
	1 PLC ±0.15
	2 PLC ±0.12
	3 PLC ±-
	4 PLC ±-
	ANGLES ±1°

MATERIAL SEE TABLE

FINISH SEE TABLE