


- 1.0 PERFORMANCE (sea level)
 1.1 FREQUENCY RANGE: DC-6 GHz
 1.2 NOMINAL IMPEDANCE: 50 OHMS
 1.3 DWT: 750 Vrms @ 60 Hz
 1.4 S21: 0.025A+0.2 dB, 6 GHz
 1.5 TEMPERATURE RANGE: -55°C TO 110°C
 1.6 PIM: -174 dBc

- 2.0 MATERIALS (RoHS/REACH)
 2.1 PLENUM & UV RATED FILE# E471211
 2.2 CABLE: SRX141
 2.3 7/16-PS 67 (2X)
 2.4 MARKER SLEEVES: RNF-100
 2.5 STRAIN RELIEF: ATUM or SCL

- 3.1 BODIES & HARDWARE: ALBALOY
 3.2 CENTER CONTACT: SILVER
 4.0 MECHANICAL
 4.1 INTERFACES PER IEC-169-4
 4.2 CONTACT RETENTION: 45 LBS AXIAL
 4.3 CABLE BENDING: 0.75R MIN

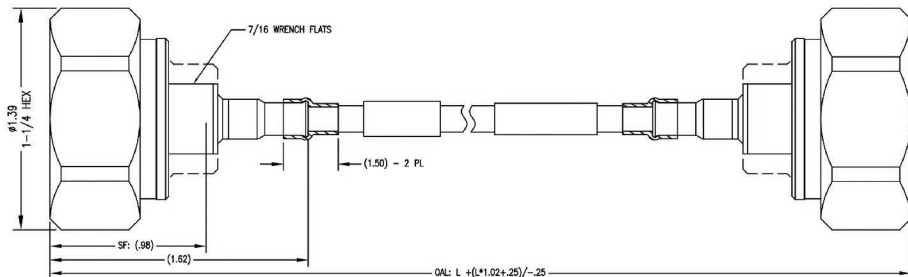

				THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HASCO COMPONENTS AND SHALL NOT BE REPRODUCED, COPIED NOR USED - IN WHOLE OR IN PART - AS A BASIS FOR THE MANUFACTURE OR SALE OF OTHER ITEMS WITHOUT THE EXPRESS WRITTEN PERMISSION OF HASCO COMPONENTS.						5214 Bonsai Street Moorpark, CA (888) 498-3242 www.hasco-inc.com
				UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES. ALL DIMENSIONS ARE AFTER PLATING. .XXX= ±.005 ALL MACHINED SURFACES $\frac{R}{2}$ MAX. .XX= ±.01 ANG. ±1/2° FRACTIONAL= ±1/64 [0.004 MAX. TIR] [L AXIS .001]				TITLE LOW PIM CABLE ASSEMBLIES SRX141 / 7/16 PLUG / 7/16 PLUG		
B UPDATED NOTES				MIX	6/11/15	SMP	FSH	MATERIAL: SEE NOTES		
A ORIGINAL				NEW	8/27/13	PRS		FINISH: SEE NOTES		
Revisions				Disp.	Date	Dwn.	Appd.	CAGE CODE: 0T8L4		
Ref:				REMOVE ALL BURRS AND SHARP EDGES .005 MAX.				DWG NO. HLP141SF-716P-716P-XX		
				INTERPRET PER ASME Y14.5M-1994				SCALE: X:X		
				THIRD ANGLE PROJECTION				REV. B		