


THIS DRAWING UNPUBLISHED.

RELEASED FOR PUBLICATION

LOC		DIST		REVISIONS			DATE	DWN	APVD
P	LTR								
-	-				-	-	-	-	-

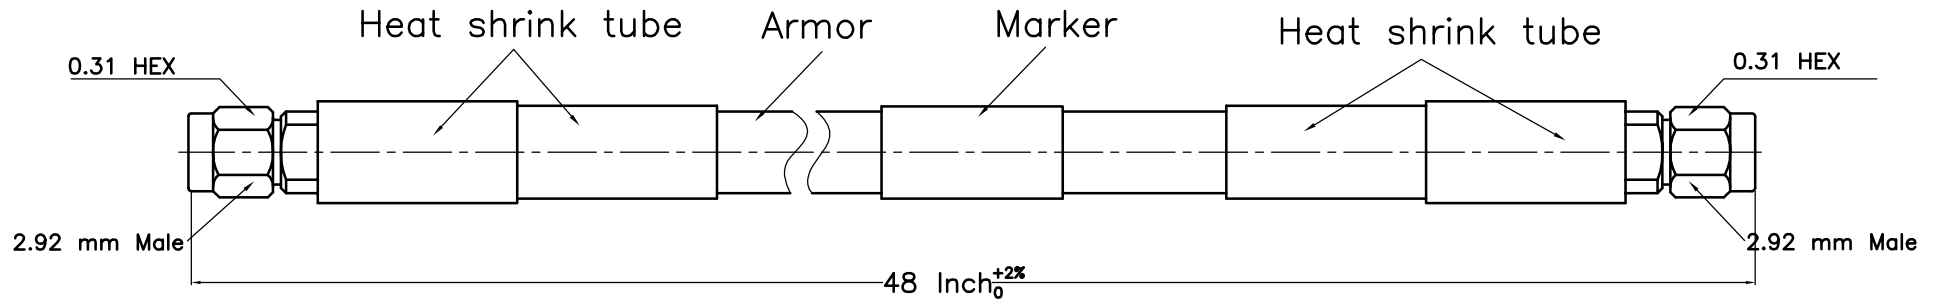

NOTES:

1.ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE:5000MΩ MIN
- 1.3 FREQUENCY RANGE: DC~40GHz
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
- 1.5 VSWR≤1.35:1@DC-40GHz
- 1.6 INSERTION LOSS: ≤4.0dB@40GHz

2.ENVIRONMENTAL:

TEMPERATURE RANGE: -55° to +85°

3. CONNECTOR MATERIAL AND FINISH:

- BODY: STAINLESS STEEL TYPE 303, PASSIVATE
- NUT: STAINLESS STEEL TYPE 303, PASSIVATE
- CENTER CONTACT: BERYLLIUM COPPER
- GOLD PLATING
- DIELECTRIC: PEEK, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	DWP	15/08/2012	HASCO HyTech Associates Sales Company, Inc					
		CHK								
DIMENSIONS INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:			NAME HULL140A Series					
		0 PLC ±0.25			PRODUCT SPEC					
		1 PLC ±0.15			APPLICATION SPEC					
		2 PLC ±0.12			SIZE					
		3 PLC ±			CAGE CODE					
MATERIAL		FINISH			DRAWING NO					
SEE TABLE		SEE TABLE			A3 OT8L4 HULL140A-29P-29P-48					
CUSTOMER DRAWING					SCALE	4: 1	SHEET	1 OF 1	RVE	1