


4		3		2		1	
THIS DRAWING UNPUBLISHED.		RELEASED FOR PUBLICATION		LOC	DEST	REVISIONS	
				P	LTR	DATE	DWN
				-	-	-	-

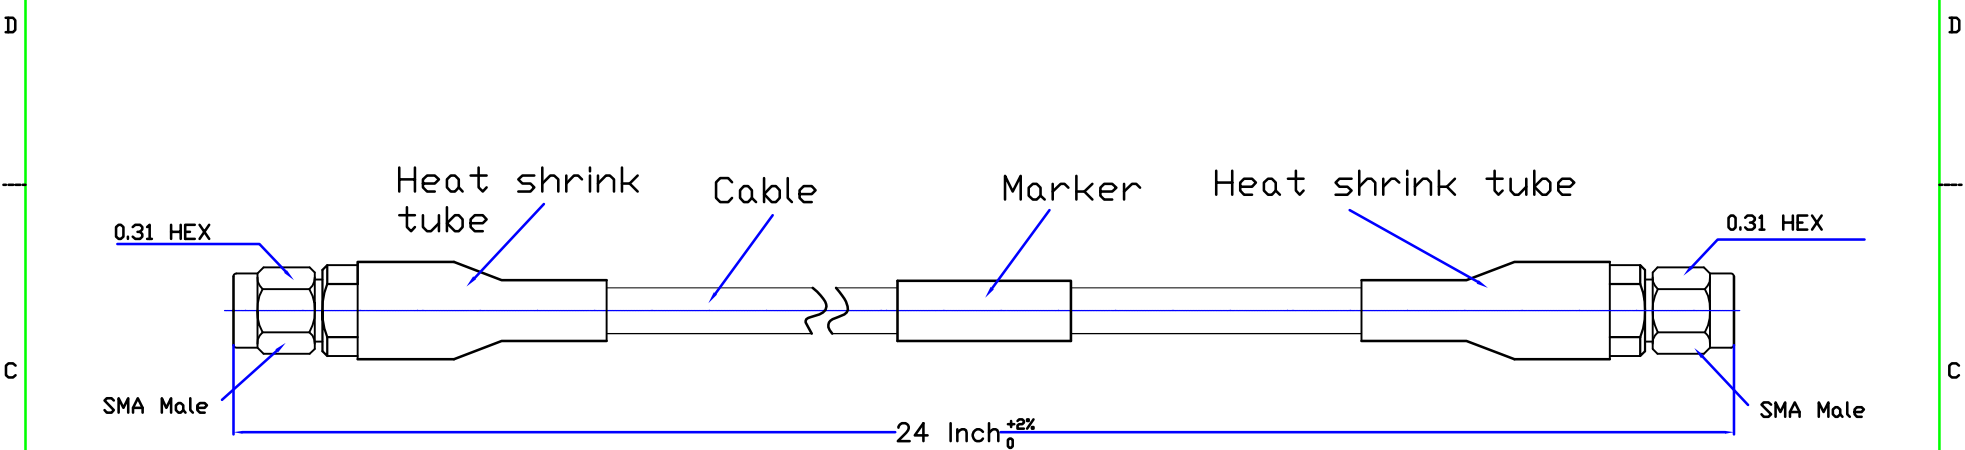

- NOTES:
- ELECTRICAL:
 - IMPEDANCE: 50Ω
 - INSULATION RESISTANCE: 5000MΩ MIN
 - FREQUENCY RANGE: DC~26.5GHz
 - DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
 - VSWR ≤ 1.35:1 @ DC-26.5GHz
 - INSERTION LOSS: ≤ 1.3dB @ 26.5GHz

2. ENVIRONMENTAL:
TEMPERATURE RANGE: -55° to +85°

3. CONNECTOR MATERIAL AND FINISH:
 BODY: STAINLESS STEEL TYPE 303, PASSIVATE
 NUT: STAINLESS STEEL TYPE 303, PASSIVATE
 CENTER CONTACT: BERYLLIUM COPPER
 , GOLD PLATING
 DIELECTRIC: PTFE, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	DWP	25/04/2023	HASCO HyTech Associates Sales Company, Inc		
DIMENSIONS INCHES		OK			NAME HULL190 Series		
TOLERANCES UNLESS OTHERWISE SPECIFIED		APVD			26.5GHz Ultra Low Loss Flexible Cable Assemblies with Excellent Phase Stability vs. Flexure & Temperature		
0 PLC ±0.025 1 PLC ±0.015 2 PLC ±0.012 3 PLC ± 4 PLC ± ANGLES 90°		PRODUCT SPEC			SIZE	CAGE CODE	DRAWING NO
MATERIAL		APPLICATION SPEC			A3	0T8L4	HULL190-S1P-S1P-24
SEE TABLE		WEIGHT			CUSTOMER DRAWING		
SEE TABLE		SCALE	1:1		SHEET	1	OF 1
		RVE			1		