


4		3		2		1	
THIS DRAWING UNPUBLISHED		RELEASED FOR PUBLICATION		LOC	DEST	REVISIONS	
				P	LTR	DATE	DWN
				-	-	-	-

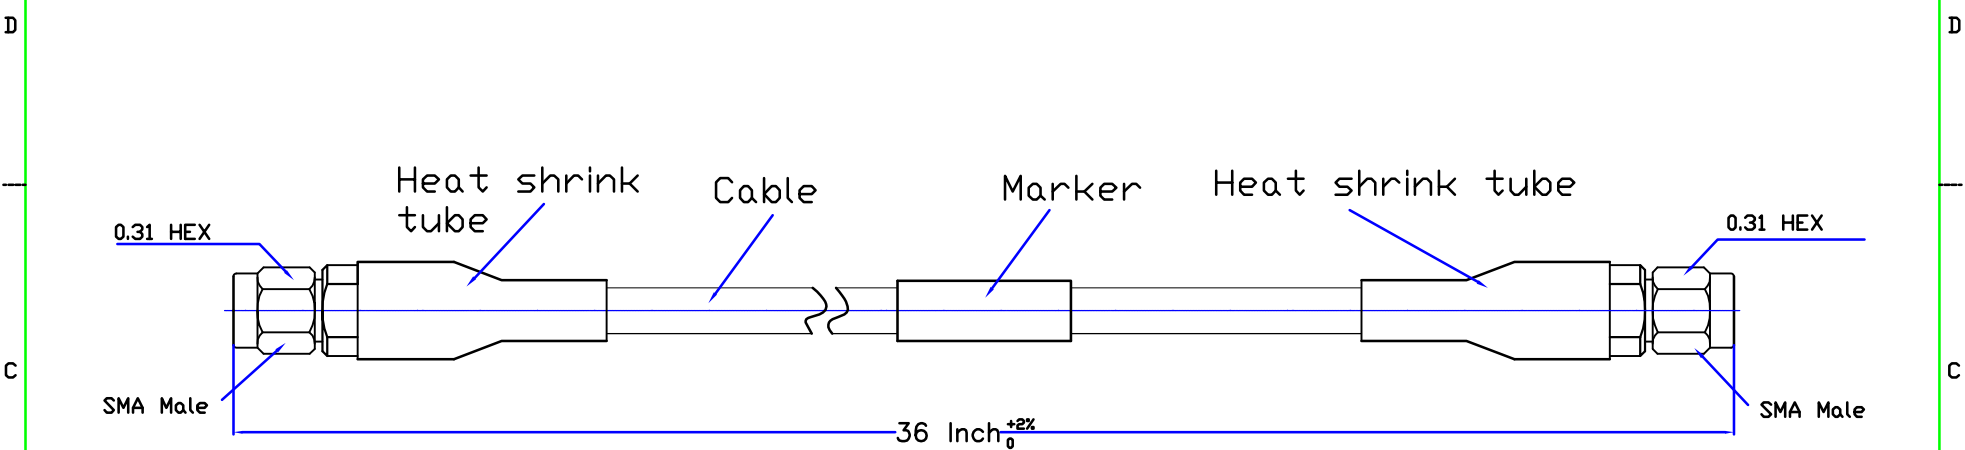

- NOTES:
- ELECTRICAL:
 - IMPEDANCE: 50Ω
 - INSULATION RESISTANCE: 5000MΩ MIN
 - FREQUENCY RANGE: DC~26.5GHz
 - DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
 - VSWR ≤ 1.35:1 @ DC-26.5GHz
 - INSERTION LOSS: ≤ 1.8dB @ 26.5GHz

2. ENVIRONMENTAL:
TEMPERATURE RANGE: -55° to +85°

3. CONNECTOR MATERIAL AND FINISH:
 BODY: STAINLESS STEEL TYPE 303, PASSIVATE
 NUT: STAINLESS STEEL TYPE 303, PASSIVATE
 CENTER CONTACT: BERYLLIUM COPPER
 , GOLD PLATING
 DIELECTRIC: PTFE, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	DWP	25/04/2023	HASCO HyTech Associates Sales Company, Inc		
DIMENSIONS INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED		NAME HULL190 @Series			
		0 PLC ±0.05 1 PLC ±0.10 2 PLC ±0.15 3 PLC ±- 4 PLC ±- ANGLES 90°		PRODUCT SPEC 26.5GHz Ultra Low Loss Flexible Cable Assemblies with Excellent Phase Stability vs. Flexure & Temperature			
MATERIAL SEE TABLE		FINISH SEE TABLE		APPLICATION SPEC		SIZE A3	CAGE CODE 0T8L4
				WEIGHT		DRAWING NO HULL190-S1P-S1P-36	
				CUSTOMER DRAWING		SCALE 1:1	SHEET 1 OF 1
						RVE 1	