


4		3		2		1	
THIS DRAWING UNPUBLISHED		RELEASED FOR PUBLICATION		LOC	DEST	REVISIONS	
				P	LTR	DATE	DVN
				-	-	-	-

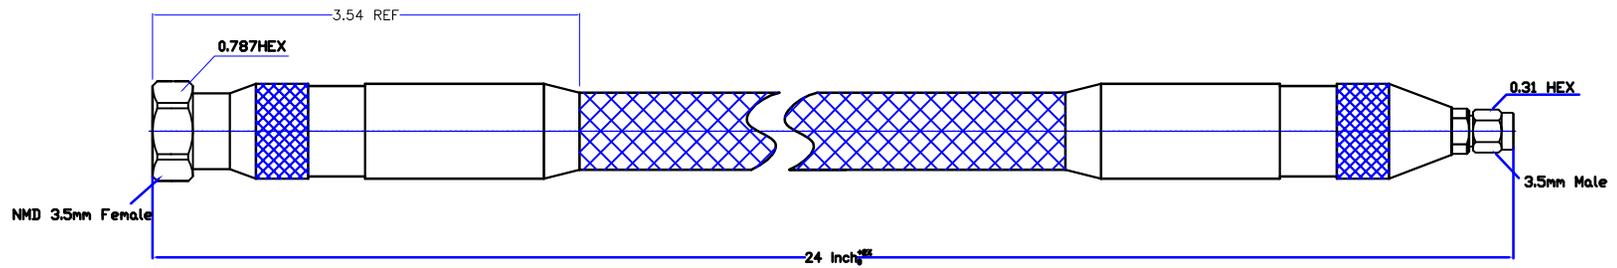

NOTES:

- 1.ELECTRICAL:
  - 1.1 IMPEDANCE: 50Ω
  - 1.2 INSULATION RESISTANCE:5000MΩ MIN
  - 1.3 FREQUENCY RANGE: DC~26.5GHz
  - 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
  - 1.5 VSWR≤1.30:1@DC-26.5GHz
  - 1.6 INSERTION LOSS: ≤2.9dB@26.5GHz

- 2.ENVIRONMENTAL:
  - TEMPERATURE RANGE: -55° to +85°

3. CONNECTOR MATERIAL AND FINISH:
  - BODY: STAINLESS STEEL TYPE 303/ ALUMINIUM ALLOY, PASSIVATE/ELECTROPHORESIS
  - NUT: STAINLESS STEEL TYPE 303, PASSIVATE
  - CENTER CONTACT: BERYLLIUM COPPER
  - GOLD PLATING
  - DIELECTRIC: PEEK, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DVN	DWP	25/04/2023	HASC0 HyTech Associates Sales Company, Inc		
DIMENSIONS INCHES		OK			NAME HVNA26 Series		
TOLERANCES UNLESS OTHERWISE SPECIFIED		APVD			26.5GHz Test Cable Assemblies For Vector Network Analyzer		
0 PLC ±0.025 1 PLC ±0.015 2 PLC ±0.012 3 PLC ±- 4 PLC ±- ANGLES 90°		PRODUCT SPEC			SIZE A3		
MATERIAL SEE TABLE		APPLICATION SPEC			CAGE CODE	DRAWING NO	
FINISH SEE TABLE		WEIGHT			0T8L4	HVNA26-35NMD-35P-24	
		CUSTOMER DRAWING			SCALE	SHEET	OF
					1:1	1	1
							RVE 1