

OPEN • SHORT • LOAD • THROUGH

Calibration Standard

3.5mm Male

HAOSLT-35P-26.5G

DC to 26.5 GHz • 50 Ω

The HASCO RF 3.5mm Male Open-Short-Load-Through Calibration Standard provides accurate and repeatable calibration for Vector Network Analyzers (VNA) up to 26.5 GHz. The integrated OSLT design combines Open, Short, and Precision Load standards in a rugged, compact assembly ideal for laboratory, production, and field applications.


Features

- Open, Short, Load, Through
- Compact one-piece design
- High return loss performance
- Low phase error
- Rugged Aluminum construction
- Laser engraved port identification
- Includes calibration data

Applications

- VNA Calibration
- RF & Microwave Test Systems
- Production Test / ATE
- Aerospace & Defense
- SATCOM
- Research & Development


Outline Drawing

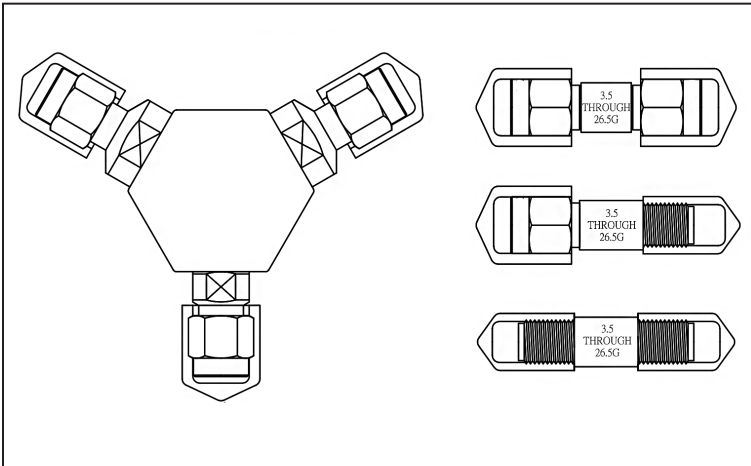

Calibration & Care

Each calibration standard or calibration kit is supplied with its own fully characterized calibration coefficient datasheet.

- Recommended calibration temperature: 20°C to 25°C
- Keep connector interfaces clean and protected
- Install protective caps when not in use
- Use calibrated torque wrench during mating
- Calibration data provided with each unit

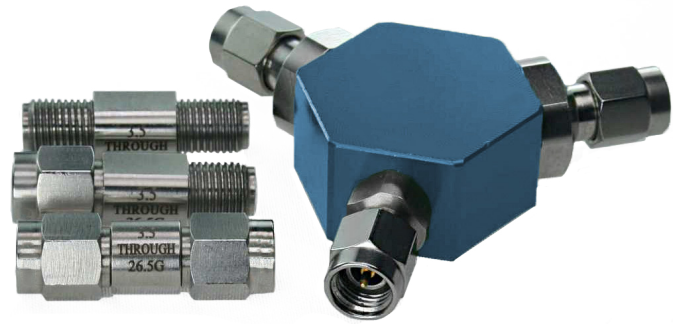

Electrical

- Impedance 50 Ω
- DC Resistance 50 $\pm$ 0.50 Ω
- Max Power 0.25 Watts
- Frequency Range DC - 26.5 GHz
- Insertion Loss (Through) $\leq$ 0.2 dB
- Phase Error (Open) $\leq$ 0.65° (DC - 3 GHz)
 $\leq$ 1.2° (3 - 8 GHz)
 $\leq$ 2.0° (8 - 26.5 GHz)
- Phase Error (Short) $\leq$ 0.5° (DC - 3 GHz)
 $\leq$ 1.0° (3 - 8 GHz)
 $\leq$ 1.75° (8 - 26.5 GHz)
- Return Loss (Open/Short) $\leq$ 0.10 dB (DC - 8 GHz)
 $\leq$ 0.15 dB (8 - 20 GHz)
 $\leq$ 0.20 dB (20 - 26.5 GHz)
- Return Loss (Load) $\geq$ 36 dB (DC - 2 GHz)
 $\geq$ 34 dB (20 - 26.5 GHz)
- Return Loss (Through) $\geq$ 30 dB (DC - 8 GHz)
 $\geq$ 26 dB (18 - 26.5 GHz)
- Capacitance (Open) 49.43 (1E-15) F
-310.13 (1E-27) F/Hz

Mechanical

- Open/Short Offset Length 29.24 ps (Open), 31.78 ps (Short)

Environmental

- Temperature Range -20°C to 75°C (storage)
- Temperature Range 20°C to 25°C (optimal)
- RoHS Compliant 

Material

- Housing Anodized Aluminum
- Body & Nut Passivated Stainless Steel
- Dielectric PEI (Open), PPO (Load/Through)
- Contact Gold Plated BeCu
- Cap PVC