## Part No: HDC26SMPJI





The **HDC26SMPJI** is a SMP DC Block, inner only design from HASCO. The SMP Female to SMP Female DC Block will operate from 1.35 MHz to 26.5 GHz with a maximum voltage of 50V.

The HASCO  $\ensuremath{\text{HDC26SMPJI}}$  is RoHS compliant.




An RF Inner Only DC Block is a coaxial device that prevents DC current flow through the center conductor while introducing minimal RF noise. There are three types of DC blocks: Inner, Outer, and Inner/Outer. The manner by which DC Blocks prevent DC current is by inserting blocking capacitors in-line with the desired blocking path. In the case of an Inner DC Blocks, they have a capacitor in series with the center conductor. Outer DC Blocks have a capacitor in the outer conductor, and Inner/Outer DC Blocks have blocking caps in both the inner conductor and outer conductor.

HASCO has a variety of DC Blocks with connector variations that can operate up to 65 GHz and frequency configurations.

## SMP Female to Female DC Block, Inner Only, 10 MHz - 26.5 GHz

Impedence	50 Ohms	
Frequency Range	1.0 MHz - 26.5 GHz	
• VSWR	1.35:1 Max	
Insertion Loss	1.3 dB Max	
• Voltage	50V Max - Inner Only	
Temperature Range	-55°C to 100°C	
Material		
Material		
• Body	Gold Plated Brass	
Center Contact	Gold Plated BeCu	
Dielectric	PTFE	



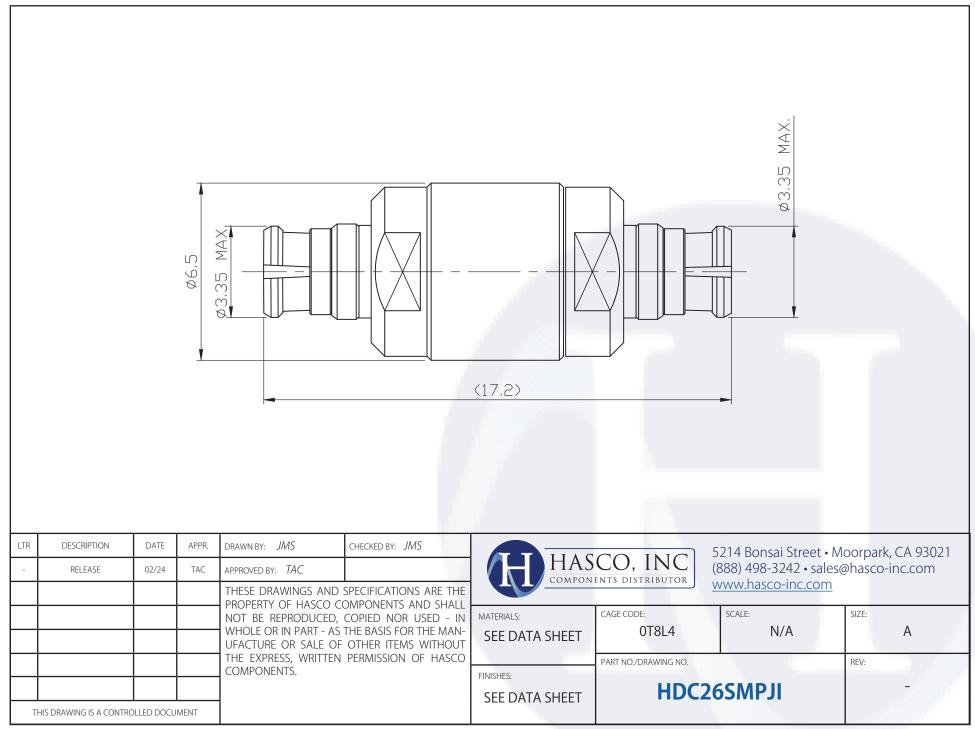

5214 Bonsai Street • Moorpark, CA 93021 (888) 498-3242 • sales@hasco-inc.com | www.hasco-inc.com