




DC Block • 2.92 mm Male-Female Inner Only • 10 MHz - 40 GHz

Part #HDC401

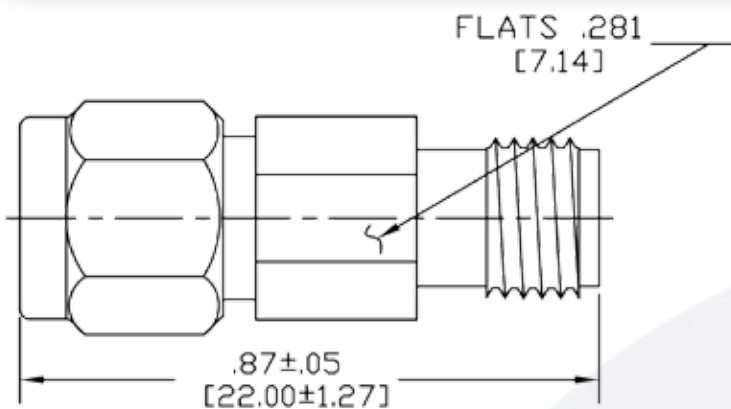

Electrical

- **Frequency Range** 10 MHz - 40 GHz
- **VSWR** 40 GHz.....1.45:1
- **Insertion Loss** 0.75 dB MAX
- **Impedence** 50 Ohms
- **Voltage** 200 Volts Max
- **Temperature Range** -65°C - +125°C

Material

- **Dielectric** High Temperature Plastic Bead
- **Housing** Passivated Stainless Steel
- **Connectors** Passivated Stainless Steel
- **Contacts** Gold Plated Beryllium Copper

Connector interfaces, finishes and materials comply with both MIL-PRF-39012 and MIL-STD-348 for 2.92 mm (SMK) connectors and interfaces and mates with SMA and 3.5 mm connectors