
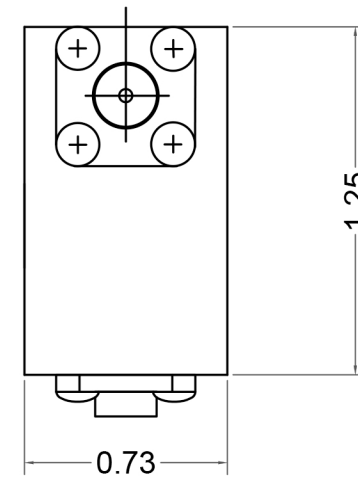


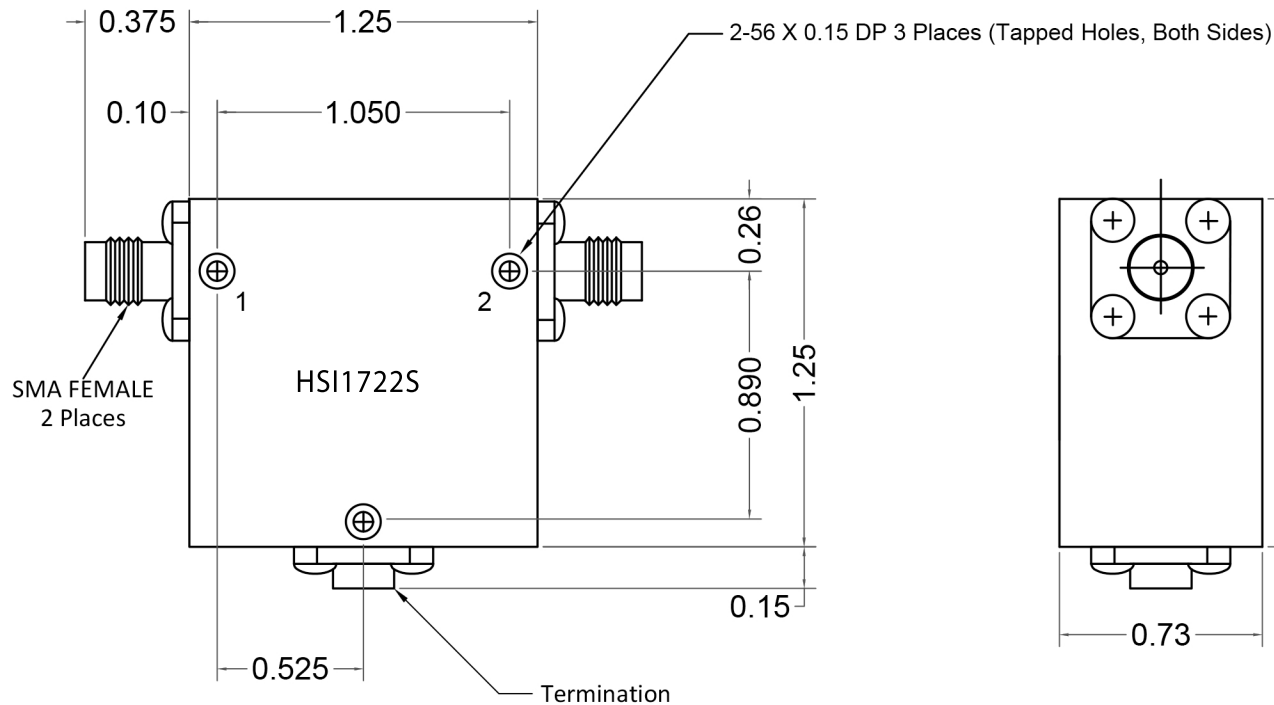

ELECTRICAL SPECIFICATIONS

FREQUENCY RANGE (MHz):	1700 - 2200
ISOLATION (dB):	20 MIN
INSERTION LOSS (dB):	0.40 MAX
VSWR:	1.25 MAX
POWER: AVG (PORT 1 TO 2):	150W
REFLECTIVE POWER (TERM):	10W
PEAK:	500W

MECHANICAL SPECIFICATIONS

CONNECTORS:	SMA-FEMALE, PASSIVATED STAINLESS STEEL
CONTACT PINS:	BERYLLIUM COPPER, GOLD PLATE
OPERATING TEMPERATURE:	-20° to +65 °C
WEIGHT (APPROX):	1.20 OUNCES

DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED		 5214 Bonsai Street Moorpark, CA (888) 498-3242 www.hasco-inc.com	
TOLERANCE XX±0.03 XXX±0.010	TITLE 1700 - 2200 MHz Isolator		
SCALE 3:1	MODEL NO HSI1722S		REV