
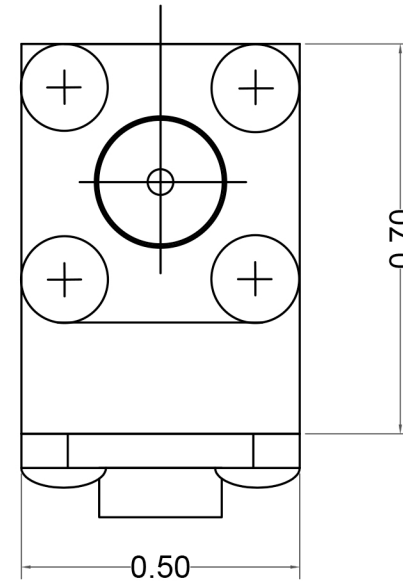


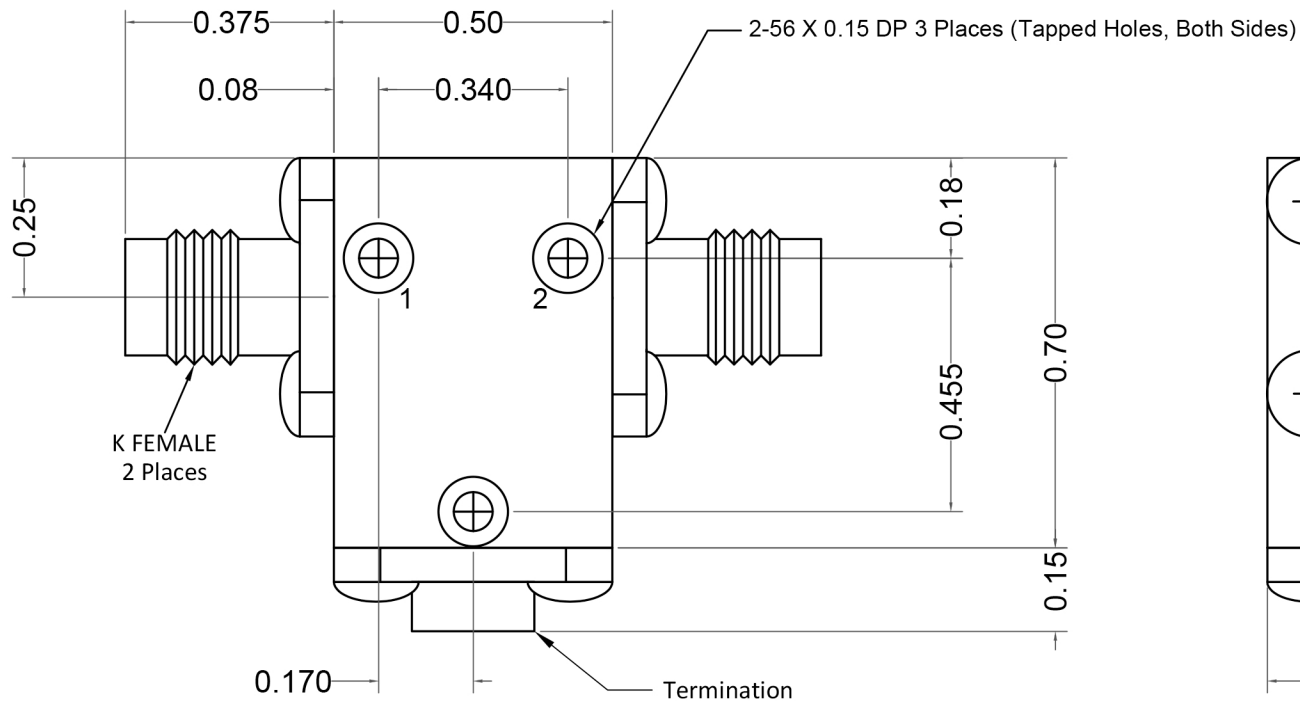

ELECTRICAL SPECIFICATIONS

FREQUENCY RANGE (GHz):	26.50 - 40.00
ISOLATION (dB):	14 MIN
INSERTION LOSS (dB):	1.00 MAX
VSWR:	1.50 MAX
POWER: AVG (PORT 1 TO 2):	5W
REFLECTIVE POWER (TERM):	2W
PEAK:	30W

MECHANICAL SPECIFICATIONS

CONNECTORS:	K-FEMALE, STAINLESS STEEL, PASSIVATE
CONTACT PINS:	BERYLLIUM COPPER, GOLD PLATE
OPERATING TEMPERATURE:	-20° to +65°C
WEIGHT (APPROX):	0.90 OUNCES

DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED		 HASCO, INC. COMPONENTS DISTRIBUTOR 5214 Bonsai Street Moorpark, CA (888) 498-3242 www.hasco-inc.com	
TOLERANCE XX±0.03 XXX±0.010		TITLE 26.50 - 40.00 GHz Isolator	
SCALE 6:1		MODEL NO HSI2640	REV