


Specification:

- * Frequency Range: DC - 6 GHz
- * VSWR max: 1.2 : 1
- * PIM: <-168 dBc
(at 1800 MHz, 43dBm per tone)

Materials:

- * Inner Conductor: Silver plated Be-Cu
- * Outer Conductor: Silver/Trimetal plated brass
- * Dielectric: PTFE

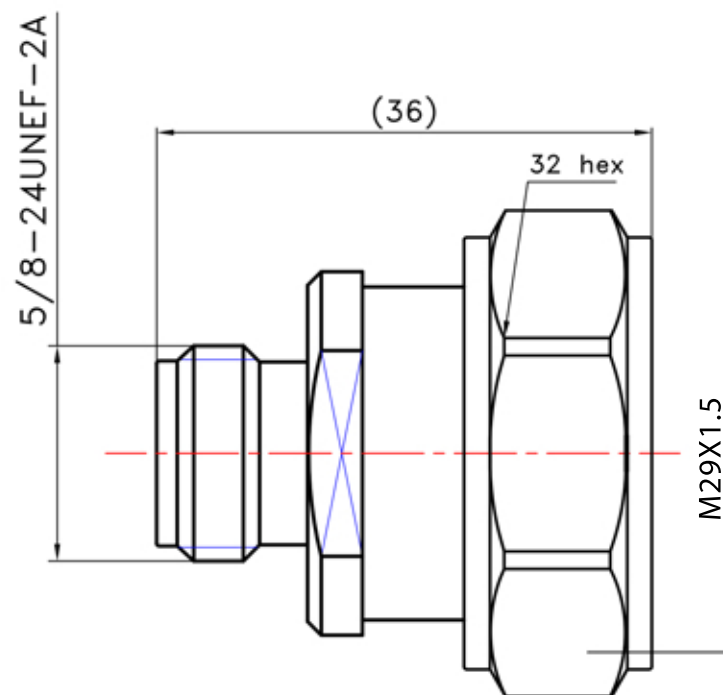

All dimension are in mm unless otherwise specified			SIZE A	SCALE NO	CAGE CODE 0T8L4		5214 Bonsai Street Moorpark, CA (888) 498-3242 www.hasco-inc.com	
			REV. A	SHEET 1/1				
DRAWING BY:	P. Xie	DATE:	10/5/2013	PART NO. 716P-NJ-SLP				TITLE Low PIM adaptor 7/16 male to N female
CHECKED BY:	W. Lu	DATE:	10/5/2013					
APPROVED BY:	Z. Jiang	DATE:	10/5/2013					